


VB-BS

Bodenverbinder, Funktionserhalt

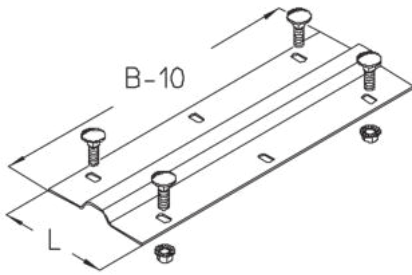

Sendzimir-feuerverzinkt, nach DIN EN 10346

| Artikel | Breite | Länge | Gewicht |
|-----------|--------|--------|----------|
| VB-BS 10S | 99 mm | 90 mm | 0,098 kg |
| VB-BS 20S | 99 mm | 190 mm | 0,209 kg |
| VB-BS 30S | 99 mm | 290 mm | 0,312 kg |
| VB-BS 40S | 99 mm | 390 mm | 0,425 kg |
| VB-BS 50S | 99 mm | 490 mm | 0,523 kg |
| VB-BS 60S | 99 mm | 590 mm | 0,599 kg |

Tauchfeuerverzinkt, nach DIN EN ISO 1461

| Artikel | Breite | Länge | Gewicht |
|-----------|--------|--------|----------|
| VB-BS 10F | 99 mm | 90 mm | 0,103 kg |
| VB-BS 20F | 99 mm | 190 mm | 0,226 kg |
| VB-BS 30F | 99 mm | 290 mm | 0,327 kg |
| VB-BS 40F | 99 mm | 390 mm | 0,45 kg |

Gewicht: Gewicht je Lagermengeneinheit



DETAIL- UND ANWENDUNGSBILDER

