


VB-BS

Bodenverbinder, Funktionserhalt

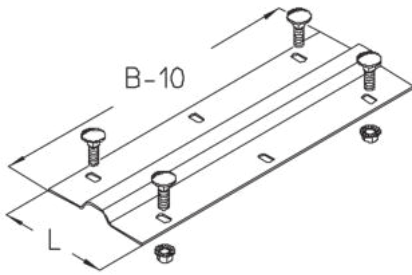

Sendzimir-feuerverzinkt, nach DIN EN 10346

Artikel	Breite	Länge	Gewicht
VB-BS 10S	99 mm	90 mm	0,098 kg
VB-BS 20S	99 mm	190 mm	0,209 kg
VB-BS 30S	99 mm	290 mm	0,312 kg
VB-BS 40S	99 mm	390 mm	0,425 kg
VB-BS 50S	99 mm	490 mm	0,523 kg
VB-BS 60S	99 mm	590 mm	0,599 kg

Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	Breite	Länge	Gewicht
VB-BS 10F	99 mm	90 mm	0,103 kg
VB-BS 20F	99 mm	190 mm	0,226 kg
VB-BS 30F	99 mm	290 mm	0,327 kg
VB-BS 40F	99 mm	390 mm	0,45 kg

Gewicht: Gewicht je Lagermengeneinheit



DETAIL- UND ANWENDUNGSBILDER

