


## KHA 8

Profilschiene 40x22 mm, gelocht Fluchtweginstallation

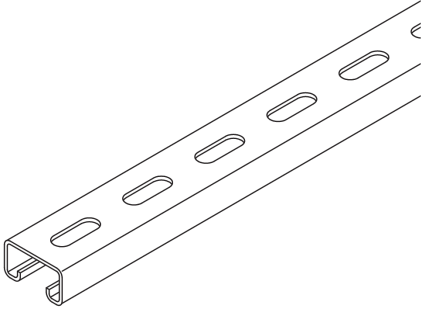

Tauchfeuerverzinkt, nach DIN EN ISO 1461


Artikel	Profilbreite	Profilhöhe	Länge	t	Gewicht
KHA 8-01F	40 mm	22 mm	100 mm	2 mm	0,145 kg
KHA 8-02F	40 mm	22 mm	200 mm	2 mm	0,31 kg
KHA 8-03F	40 mm	22 mm	300 mm	2 mm	0,46 kg
KHA 8-04F	40 mm	22 mm	400 mm	2 mm	0,62 kg
KHA 8-05F	40 mm	22 mm	500 mm	2 mm	0,77 kg
KHA 8-06F	40 mm	22 mm	600 mm	2 mm	0,93 kg
KHA 8-07F	40 mm	22 mm	700 mm	2 mm	1,08 kg

t: Materialstärke

**Gewicht:** Gewicht je Lagermeneinheit

## DETAIL- UND ANWENDUNGSBILDER





$$W_y = 1.05 \text{ cm}^3$$
$$W_z = 2.24 \text{ cm}^3$$
$$I_y = 1.18 \text{ cm}^4$$
$$I_z = 4.48 \text{ cm}^4$$

