

KDU 57

Konsolhalter, 57x30 mm Fluchtweginstallation

Tauchfeuerverzinkt, nach DIN EN ISO 1461


Artikel	Profilbreite	Profilhöhe	Länge	t	Gewicht
KDU 57-02F	57 mm	30 mm	200 mm	5 mm	0,59 kg
KDU 57-03F	57 mm	30 mm	300 mm	5 mm	0,77 kg
KDU 57-04F	57 mm	30 mm	400 mm	5 mm	0,95 kg
KDU 57-05F	57 mm	30 mm	500 mm	5 mm	1,13 kg
KDU 57-06F	57 mm	30 mm	600 mm	5 mm	1,31 kg
KDU 57-07F	57 mm	30 mm	700 mm	5 mm	1,49 kg
KDU 57-08F	57 mm	30 mm	800 mm	5 mm	1,68 kg
KDU 57-09F	57 mm	30 mm	900 mm	5 mm	1,86 kg
KDU 57-10F	57 mm	30 mm	1000 mm	5 mm	2,04 kg
KDU 57-11F	57 mm	30 mm	1100 mm	5 mm	2,22 kg
KDU 57-12F	57 mm	30 mm	1200 mm	5 mm	2,4 kg
KDU 57-13F	57 mm	30 mm	1300 mm	5 mm	2,58 kg
KDU 57-14F	57 mm	30 mm	1400 mm	5 mm	2,77 kg
KDU 57-15F	57 mm	30 mm	1500 mm	5 mm	2,95 kg

t: Materialstärke

Gewicht: Gewicht je Lagereinheit



DETAIL- UND ANWENDUNGSBILDER

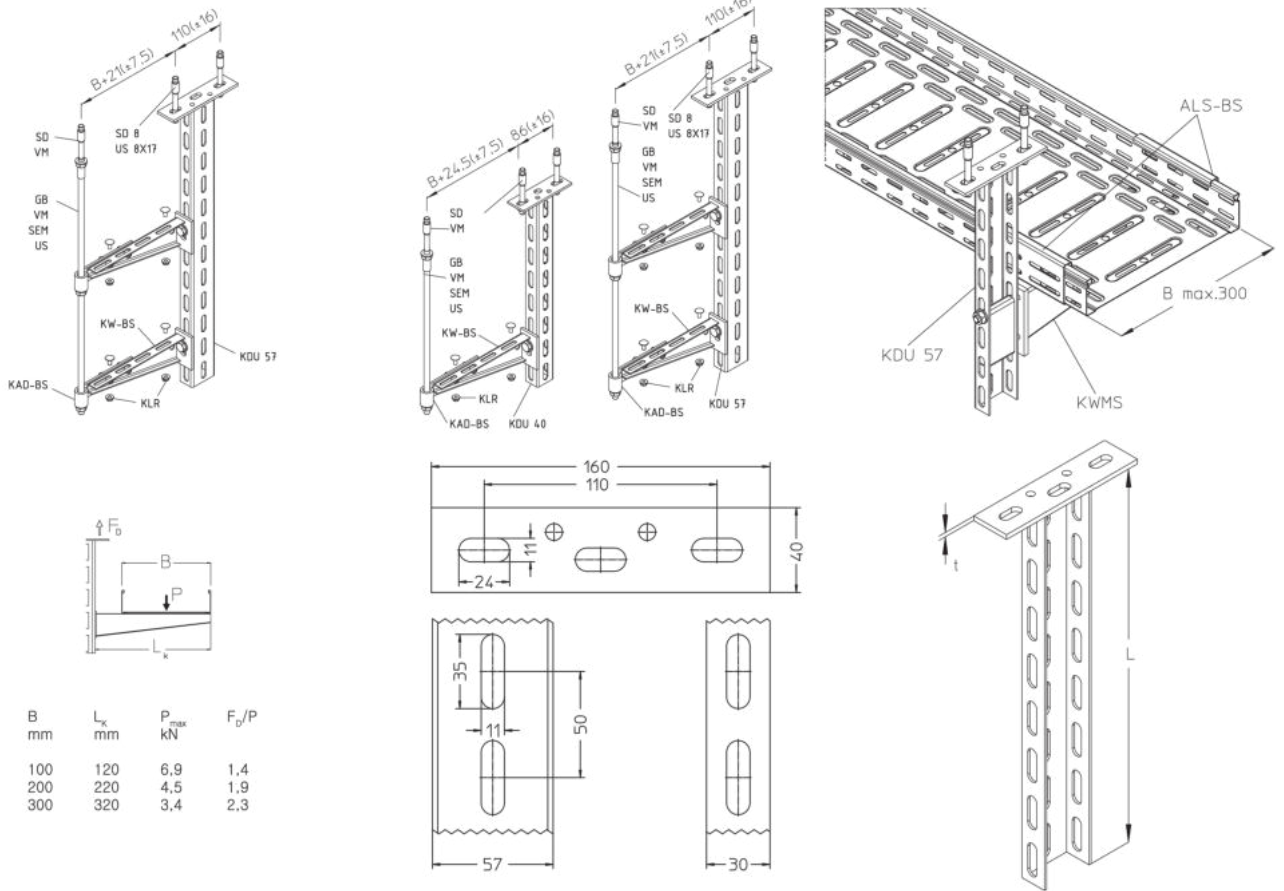

B mm	L_x mm	P_{max} kN	F_D/P
100	120	6,9	1,4
200	220	4,5	1,9
300	320	3,4	2,3

