

Přisazené svítidlo LED s čidlem  
Prisadené svietidlo LED s čidlom




LED SMD




## VARSO LED-SE

microwave  
**MOTION**  
sensor


LED  
technology




VARSO LED 18W...L




VARSO LED 24W...L



VARSO LED 18W...O



VARSO LED 24W...O

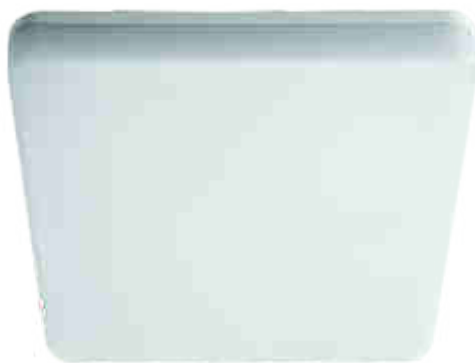

VARSO LED...L-SE




VARSO LED...O-SE



**Kanlux**



Model	Code	Power [W]	Light Output [lm]	Temperature [K]
VARSO LED 18W-NW-L-SE	26980	18	1700	4000
VARSO LED 18W-NW-O-SE	26981	18	1700	4000
VARSO LED 18W-WW-O-SE	26982	18	1620	3000
VARSO LED 24W-NW-L-SE	26983	24	2280	4000
VARSO LED 24W-NW-O-SE	26984	24	2280	4000

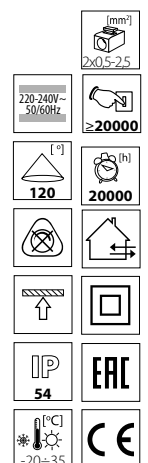

CZ

bilá  
těleso svítidla: polykarbonát (PC) / difúzor: polykarbonát (PC)

Dosah čidla: max. 9m / Detekční úhel čidla: 360° / Nastavení doby svícení: 5s - 5min / Regulace intenzity okolního osvětlení: 2/10/50 lx/OFF

SK

biela  
teleso svietidla: polykarbonát (PC) / difúzor: polykarbonát (PC)

Dosah snímača: max. 9m / Detekčný uhol snímača: 360° / Nastavenie doby svietenia: 5s - 5min / Regulácia intenzity okolitého osvetlenia: 2/10/50 lx / OFF