



LED SMD

G13



T8 LED GLASSv3



IC Driver



PF > 0.9
high





140lm
W




GLASS

TUBE

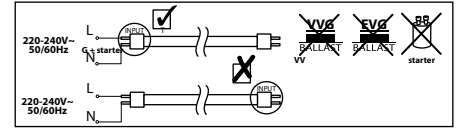

OR

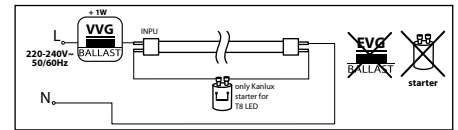

T8 LED GLASSv3 9W NW



T8 LED GLASSv3 24W NW



220-240V-50/60Hz

250 [°]

25000 [h]

≥15000

-10=40 [°C]

A++



ERC

CE

Kanlux



[W]



Tc [K] ≤ 6x MacAdam



[lm]

kWh/1000h

Model	Part No.	Power [W]	Temp [K]	Beam Angle [°]	Light Output [lm]	Efficiency kWh/1000h
T8 LED GLASSv3 9W-NW	26062	9	4000	1260	9	
T8 LED GLASSv3 9W-CW	26063	9	6500	1260	9	
T8 LED GLASSv3 18W-NW	26064	18	4000	2520	9	
T8 LED GLASSv3 18W-CW	26065	18	6500	2520	18	
T8 LED GLASSv3 24W-NW	26066	24	4000	3360	18	
T8 LED GLASSv3 24W-CW	26067	24	6500	3360	18	