

Series
VENTS VKP mini



Compact centrifugal fans in steel casing with the air flow up to **783 m³/h** with permanent air flow maintaining at alternating pressure in the system

Applications

Supply and exhaust ventilation systems for various small premises with a limited mounting space. For connection with round ducts from 80 to 200 mm in diameter. Various casing modifications with the number of inlets from 1 to 6 enable using one fan for air exhaust from several premises simultaneously. This makes ventilation system mounting much easier.

Design

The fan casing is made of steel with polymeric coating. The minimum casing height enables fan mounting in a limited space. The removable cover provides free access to the motor, ensures easy mounting and enables the fan and air ducts maintenance without dismounting.

Motor

The centrifugal impeller with backward curved blades for high pressure is powered by means of the single phase three-speed motor with external rotor. The specially designed smart impeller with forward curved blades maintains constant air flow by means of controlling the motor speed depending on air resistance in the air duct.

Motor is equipped with incorporated overheating protection with automatic restart and ball bearings for long service life designed for at least 40 000 hours.

For precise features, safe operation and low noise, each turbine is dynamically balanced while assembly. Motor protection rating IP44.


Speed control

The motor speed changes automatically as a function of ventilation system resistance thus ensuring the constant air flow. For smooth or step speed control a thyristor or autotransformer controller can be applied. Motor speed changes automatically as a function of the ventilation system resistance. This ensures constant airflow. If a three-position switch is additionally installed, three speeds of motor can be controlled manually.

Several fans can be connected to one controller in case the total power and operating current do not exceed the controller rated values.

Mounting

Mounting at any angle to the wall is performed with the fastening bracket supplied with the unit. The fan is powered through the external terminal box. Electric connection and mounting shall be performed in compliance with the manual and wiring diagram on the terminal box.

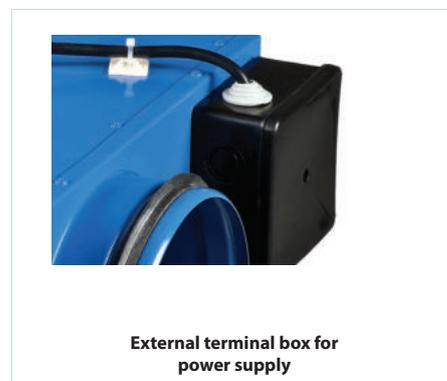


Designation key

| Series | Exhaust spigot diameter | Intake spigot diameter | Number of intake spigots | Type |
|------------------|-------------------------|------------------------|----------------------------|-------------|
| VENTS VKP | 80; 100; 125; 150; 200 | 80; 100; 125; 150; 200 | 1 (by default); 2; 4; 5; 6 | mini |

Accessories





VKP mini fan modifications

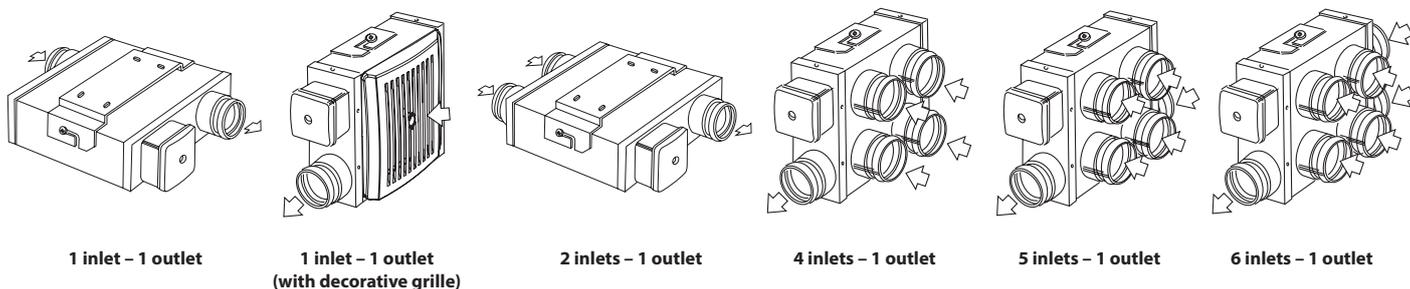

Technical data



| | VKP 80 mini | | | VKP 100 mini | | |
|--|-------------|------|------|--------------|------|------|
| | 1 | 2 | 3 | 1 | 2 | 3 |
| Speed | 1 | 2 | 3 | 1 | 2 | 3 |
| Voltage [V/50 Hz] | 1~230 | | | | | |
| Power [W] | 20 | 26 | 45 | 20 | 26 | 45 |
| Current [A] | 0.32 | 0.34 | 0.4 | 0.32 | 0.34 | 0.4 |
| Max. air flow [m ³ /h] | 88 | 130 | 162 | 97 | 138 | 176 |
| RPM [min ⁻¹] | 1400 | 1800 | 2600 | 1400 | 1800 | 2600 |
| Sound pressure level at 3 m distance [dBA] | 32 | 35 | 43 | 33 | 36 | 44 |
| Max. transported air temperature [°C] | +50 | | | | | |
| SEC class | C | | | | | |
| Protection rating | IPX4 | | | | | |

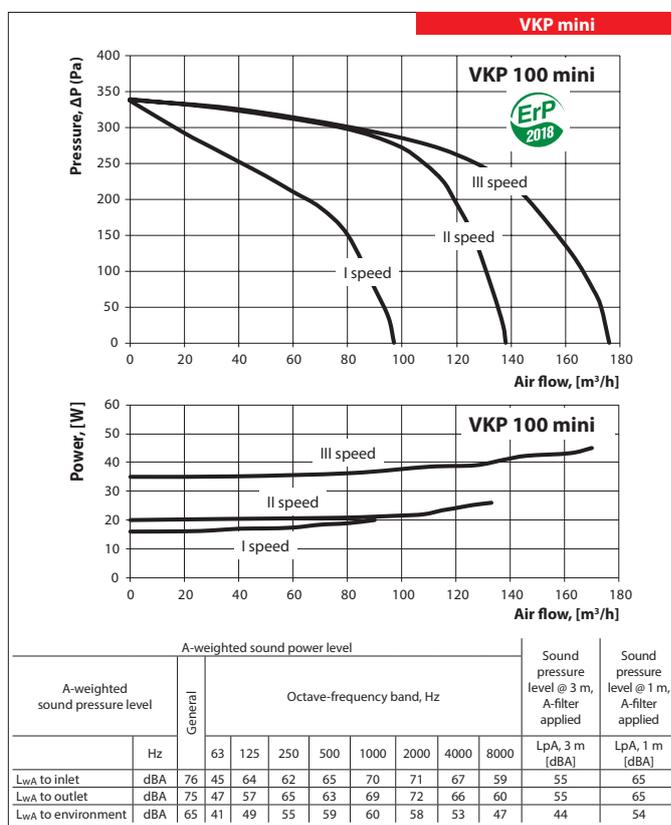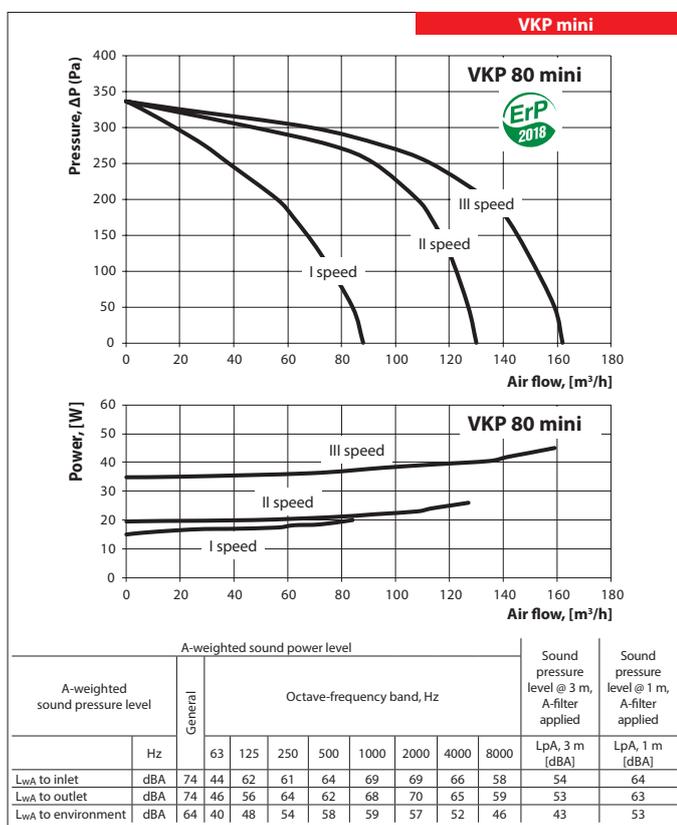

FANS FOR ROUND DUCTS



Technical data

| | VKP 125 mini | VKP 125 mini C |
|--|--------------|----------------|
| Speed | 1 | 1 |
| Voltage [V/50 Hz] | 1~230 | |
| Power [W] | 48 | 127 |
| Current [A] | 0.22 | 0.55 |
| Max. air flow [m ³ /h] | 242 | 414 |
| RPM [min ⁻¹] | 1430 | 2800 |
| Sound pressure level at 3 m distance [dBA] | 37 | 47 |
| Max. transported air temperature [°C] | +50 | |
| SEC class | C | |
| Protection rating | IPX4 | |

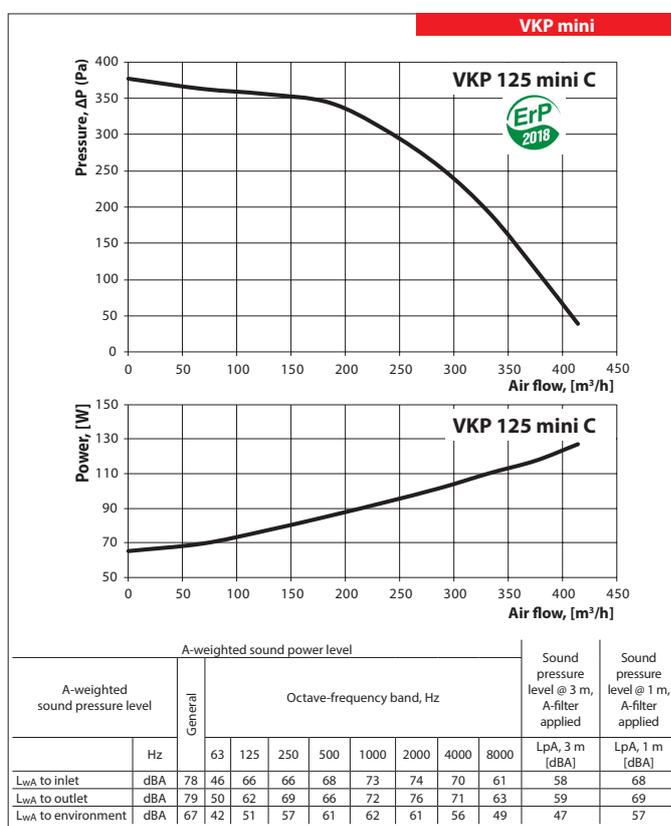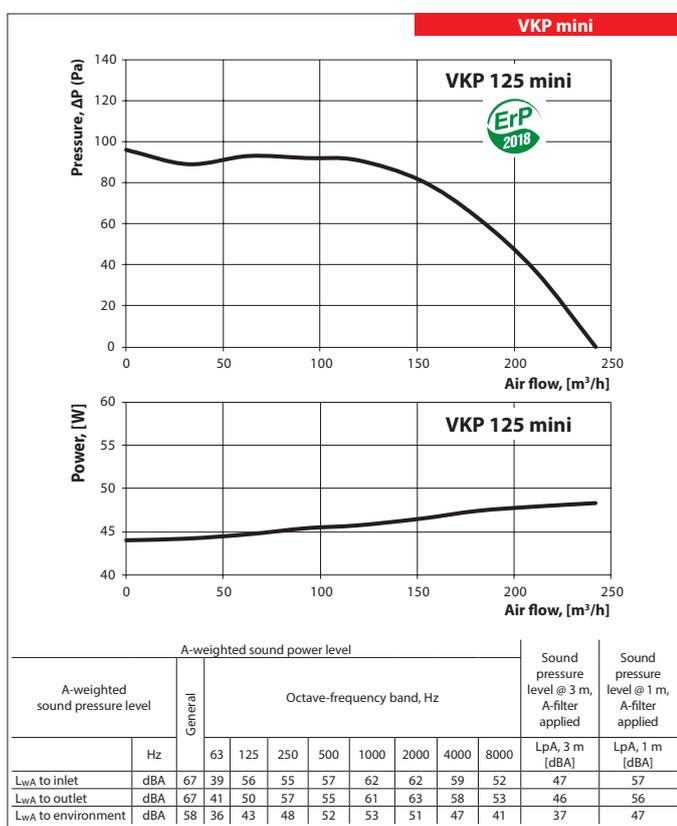

Technical data



| | VKP 125 mini Duo | | VKP 150 mini |
|--|------------------|------|--------------|
| Speed | 1 | 2 | 1 |
| Voltage [V/50 Hz] | 1~230 | | 1~230 |
| Power [W] | 42 | 48 | 113 |
| Current [A] | 0.18 | 0.22 | 0.52 |
| Max. air flow [m ³ /h] | 220 | 300 | 536 |
| RPM [min ⁻¹] | 1960 | 2610 | 1050 |
| Sound pressure level at 3 m distance [dBA] | 39 | 45 | 46 |
| Max. transported air temperature [°C] | +50 | | |
| SEC class | C | | |
| Protection rating | IPX4 | | |

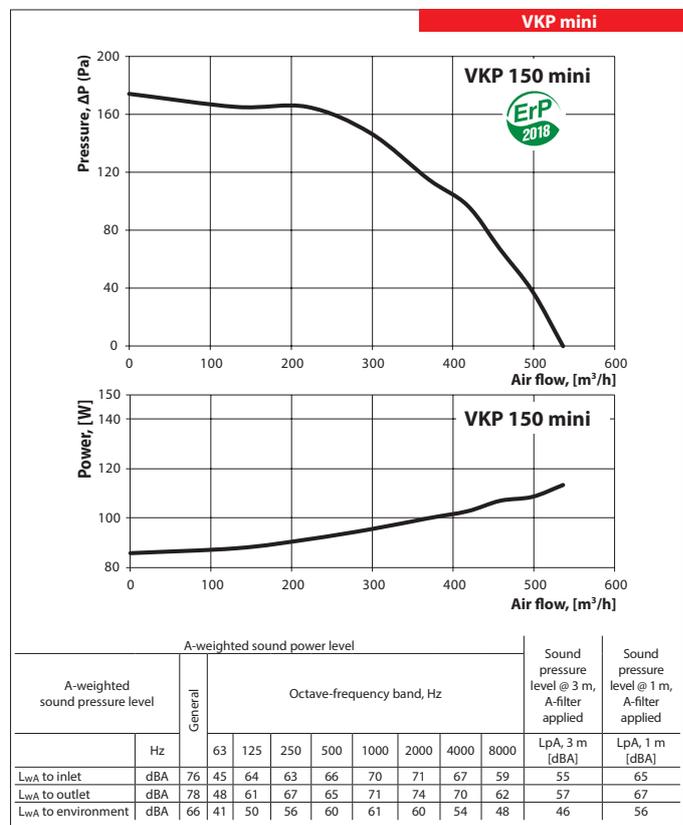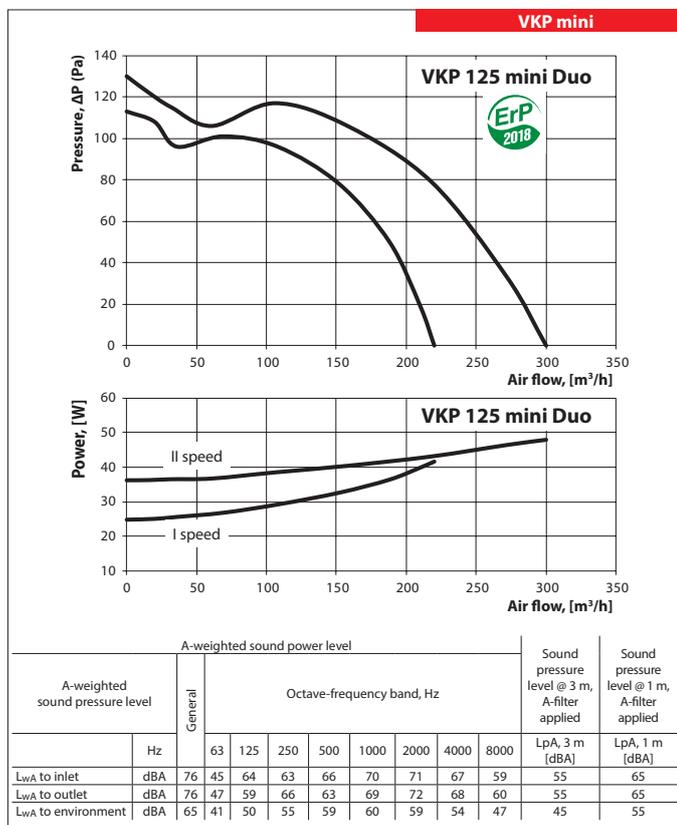

FANS FOR ROUND DUCTS


Technical data

| | VKP 150 mini Duo | | VKP 200 mini |
|--|------------------|------|--------------|
| Speed | 1 | 2 | 1 |
| Voltage [V/50 Hz] | | | |
| Power [W] | 98 | 122 | 139 |
| Current [A] | 0.43 | 0.56 | 0.61 |
| Max. air flow [m³/h] | 356 | 533 | 783 |
| RPM [min⁻¹] | 750 | 870 | 950 |
| Sound pressure level at 3 m distance [dBA] | 45 | 46 | 47 |
| Max. transported air temperature [°C] | +50 | | |
| SEC class | C | | |
| Protection rating | IPX4 | | |

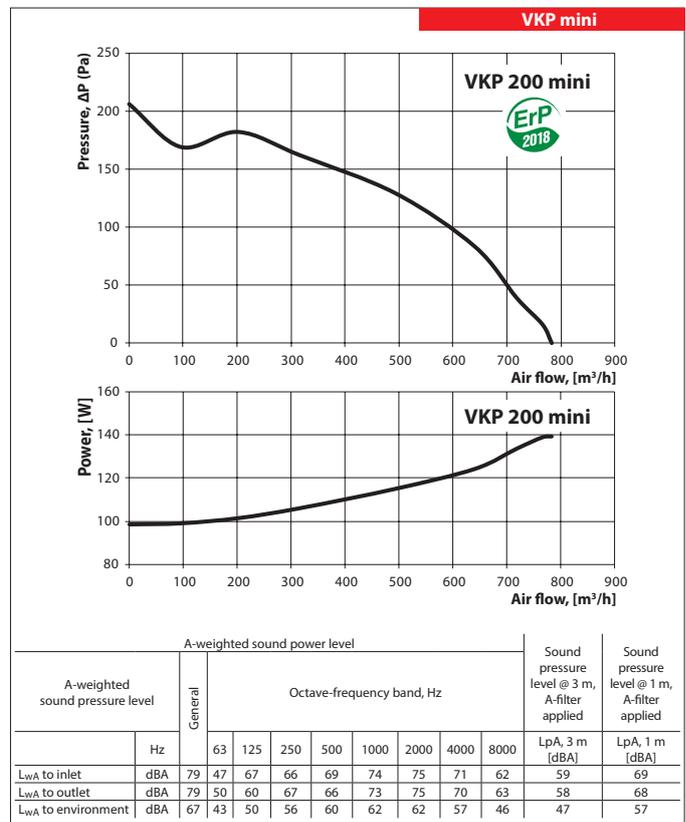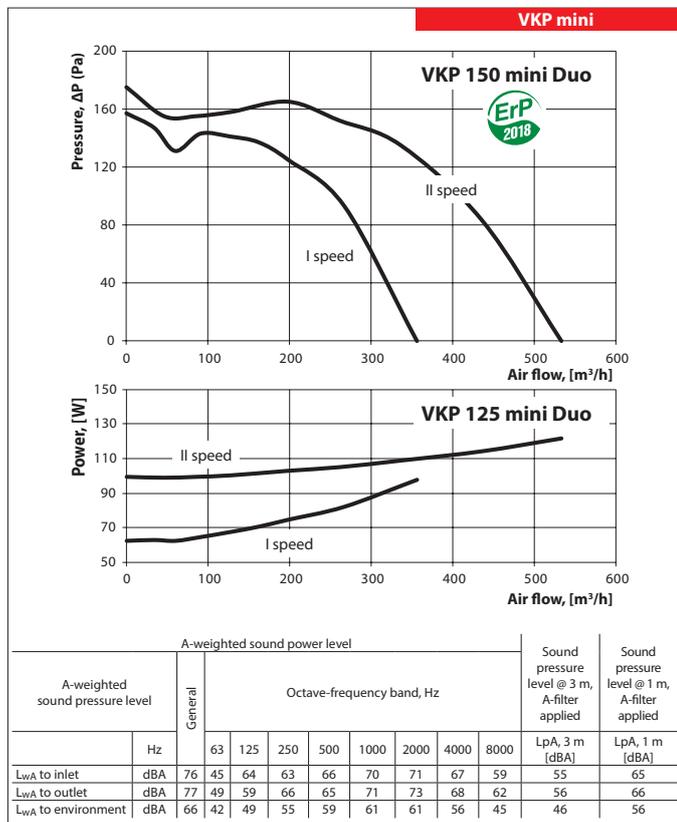

Technical data

| VKP 200 mini Duo | | |
|--|------|------|
| Speed | 1 | 2 |
| Voltage [V/50 Hz] | | |
| Power [W] | 103 | 142 |
| Current [A] | 0.45 | 0.63 |
| Max. air flow [m ³ /h] | 460 | 752 |
| RPM [min ⁻¹] | 770 | 1200 |
| Sound pressure level at 3 m distance [dBA] | 46 | 48 |
| Max. transported air temperature [°C] | +50 | |
| SEC class | C | |
| Protection rating | IPX4 | |

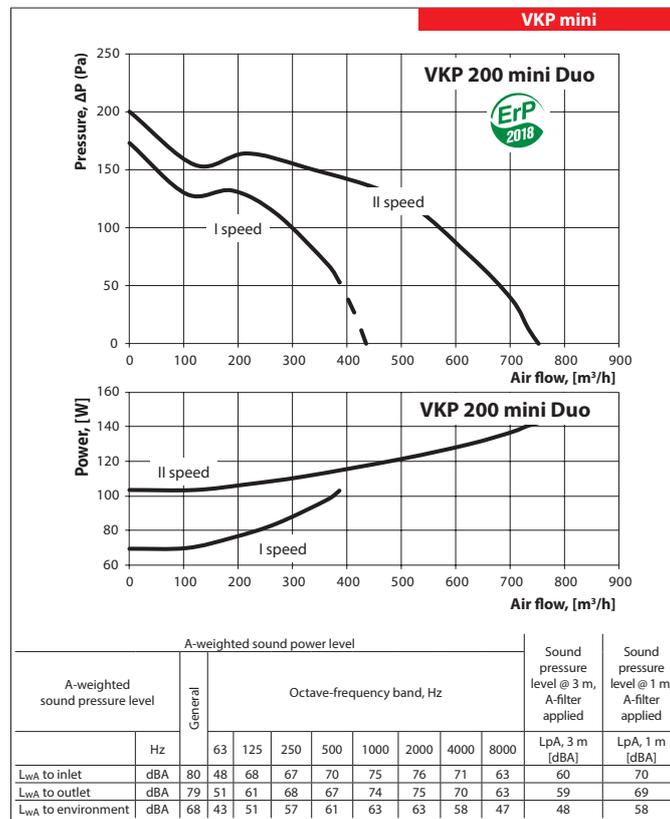

FANS FOR ROUND DUCTS

Fan overall dimensions

| Type | Dimensions [mm] | | | | | | | | Weight [kg] | Fig.no. |
|--------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-------------|---------|
| | ∅D | ∅D1 | B | H | H1 | L | L1 | L2 | | |
| VKP 80 mini | 79 | 79 | 252 | 90 | – | 351 | – | 253 | 2.0 | 3 |
| VKP 100 mini | 99 | 99 | 252 | 110 | – | 351 | – | 253 | 3.37 | 3 |
| VKP 80 P mini | 79 | – | 252 | 90 | 126 | – | 297 | 253 | 2.0 | 1 |
| VKP 100 P mini | 99 | – | 252 | 90 | 144 | – | 297 | 253 | 3.37 | 1 |
| VKP 80/80*2 mini | 79 | 79 | 252 | 90 | – | 351 | – | 253 | 3.28 | 5 |
| VKP 100/100*2 mini | 99 | 99 | 252 | 110 | – | 351 | – | 253 | 3.48 | 5 |
| VKP 80/80*4 mini | 79 | 79 | 252 | 90 | 136 | – | 297 | 253 | 3.28 | 2 |
| VKP 100/100*4 mini | 99 | 99 | 252 | 110 | 166 | – | 297 | 253 | 3.48 | 2 |
| VKP 100/80*2 mini | 99 | 79 | 252 | 110 | – | 351 | – | 253 | 3.48 | 5 |
| VKP 100/80*4 mini | 99 | 79 | 252 | 110 | 166 | – | 297 | 253 | 3.48 | 2 |
| VKP 80/80*5 mini | 79 | 79 | 252 | 90 | 136 | 351 | – | 253 | 3.28 | 4 |
| VKP 80/80*6 mini | 79 | 79 | 252 | 90 | 136 | 351 | – | 253 | 3.30 | 6 |
| VKP 100/80*6 mini | 99 | 79 | 252 | 110 | 166 | 351 | – | 253 | 3.73 | 6 |
| VKP 100/80*5 mini | 99 | 79 | 252 | 110 | 166 | 351 | – | 253 | 3.73 | 4 |
| VKP 100/100*5 mini | 99 | 99 | 252 | 110 | 166 | 351 | – | 253 | 3.73 | 4 |
| VKP 100/100*6 mini | 99 | 99 | 252 | 110 | 166 | 351 | – | 253 | 3.73 | 6 |
| VKP 125 mini | 124 | 124 | 270 | 141 | – | 397 | – | 299 | 5.20 | 7 |
| VKP 125 C mini | 124 | 124 | 270 | 141 | – | 397 | – | 299 | 5.80 | 7 |
| VKP 125 mini Duo | 124 | 124 | 303 | 152 | – | 430 | – | 330 | 6.00 | 7 |
| VKP 150 mini | 149 | 149 | 340 | 207 | – | 447 | – | 350 | 7.10 | 7 |
| VKP 150 mini Duo | 149 | 149 | 340 | 207 | – | 447 | – | 350 | 7.70 | 7 |
| VKP 200 mini | 198 | 198 | 362 | 222 | – | 494 | – | 397 | 8.80 | 7 |
| VKP 200 mini Duo | 198 | 198 | 362 | 222 | – | 494 | – | 397 | 8.80 | 7 |

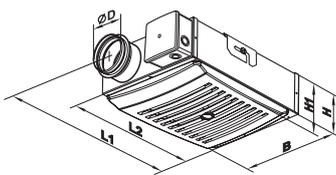


Fig. 1

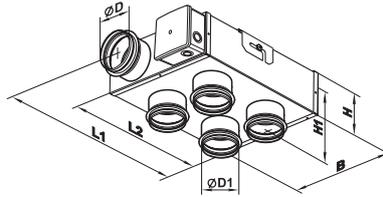


Fig. 2

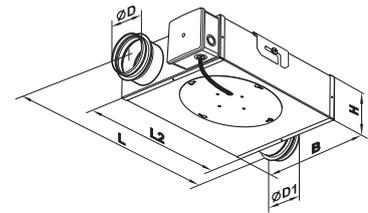


Fig. 3

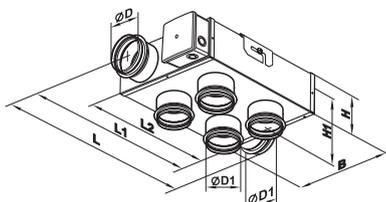


Fig. 4

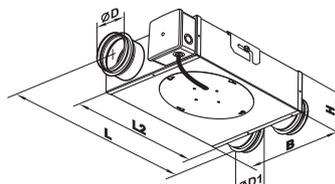


Fig. 5

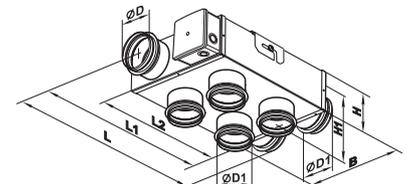


Fig. 6

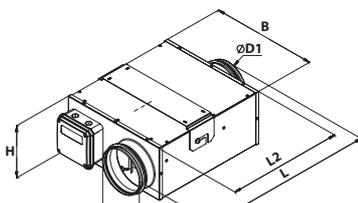



Fig. 7

■ VKP mini ventilation examples

▶ 1 inlet - 1 outlet



▶ 2 inlets - 1 outlet

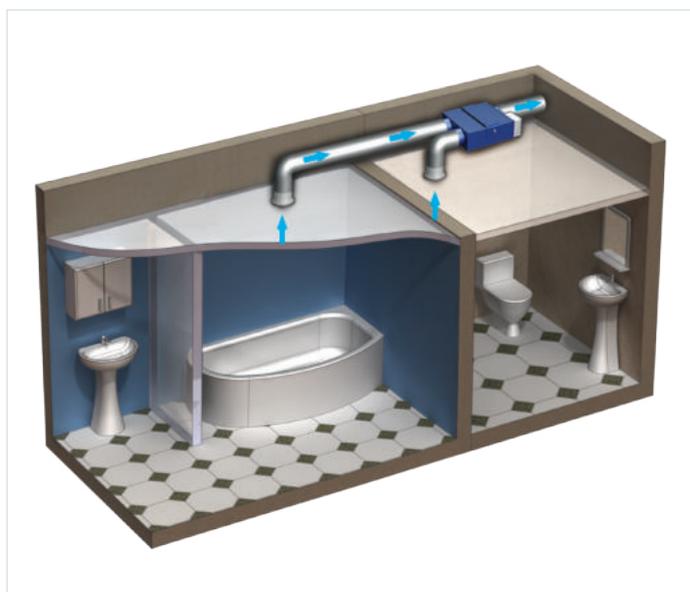

▶ 4 inlets - 1 outlet

