









	100 - 240 V
	50 - 60 Hz
	2 x 2,5 mm ²
 DALI / DSI	1 x 1,5 mm ²
	RJ 45
	CEI 60669-2-1

 + 45°C - 5°C	N/≠/L1		NO/C/N	
	 DALI / DSI (16x2) max/out			
230 V~	1000 VA	4,3 A	1 x 500 VA	2,1 A
110 V~			1 x 250 VA	








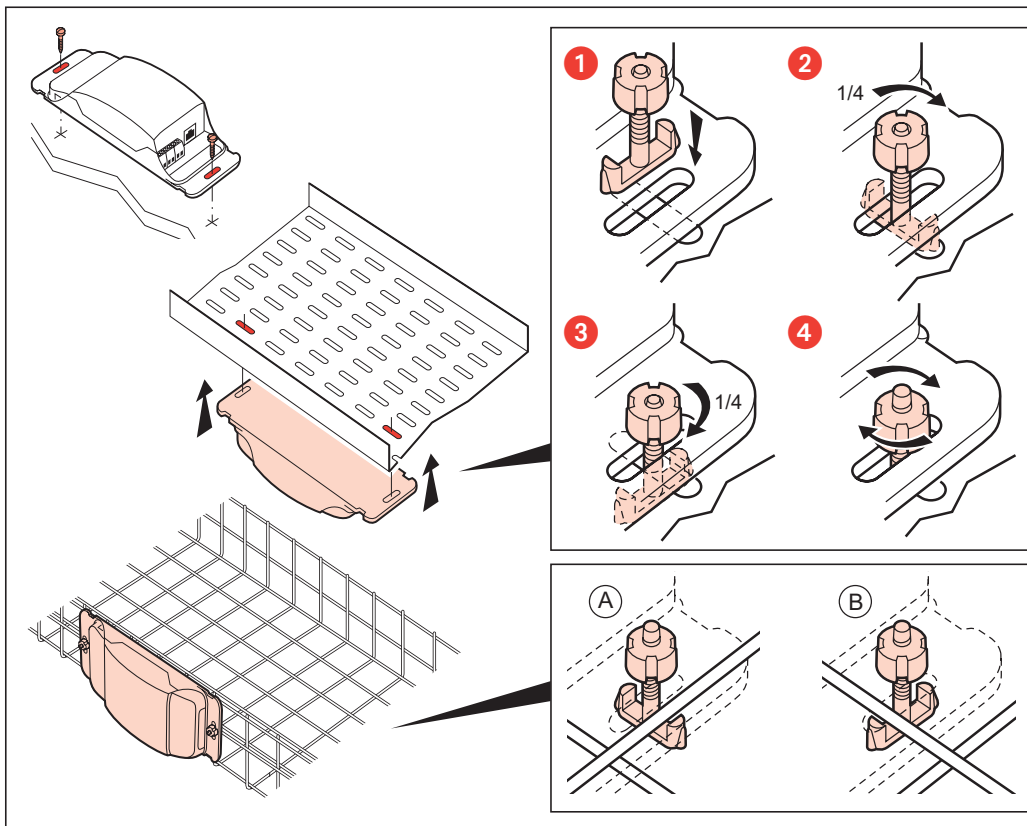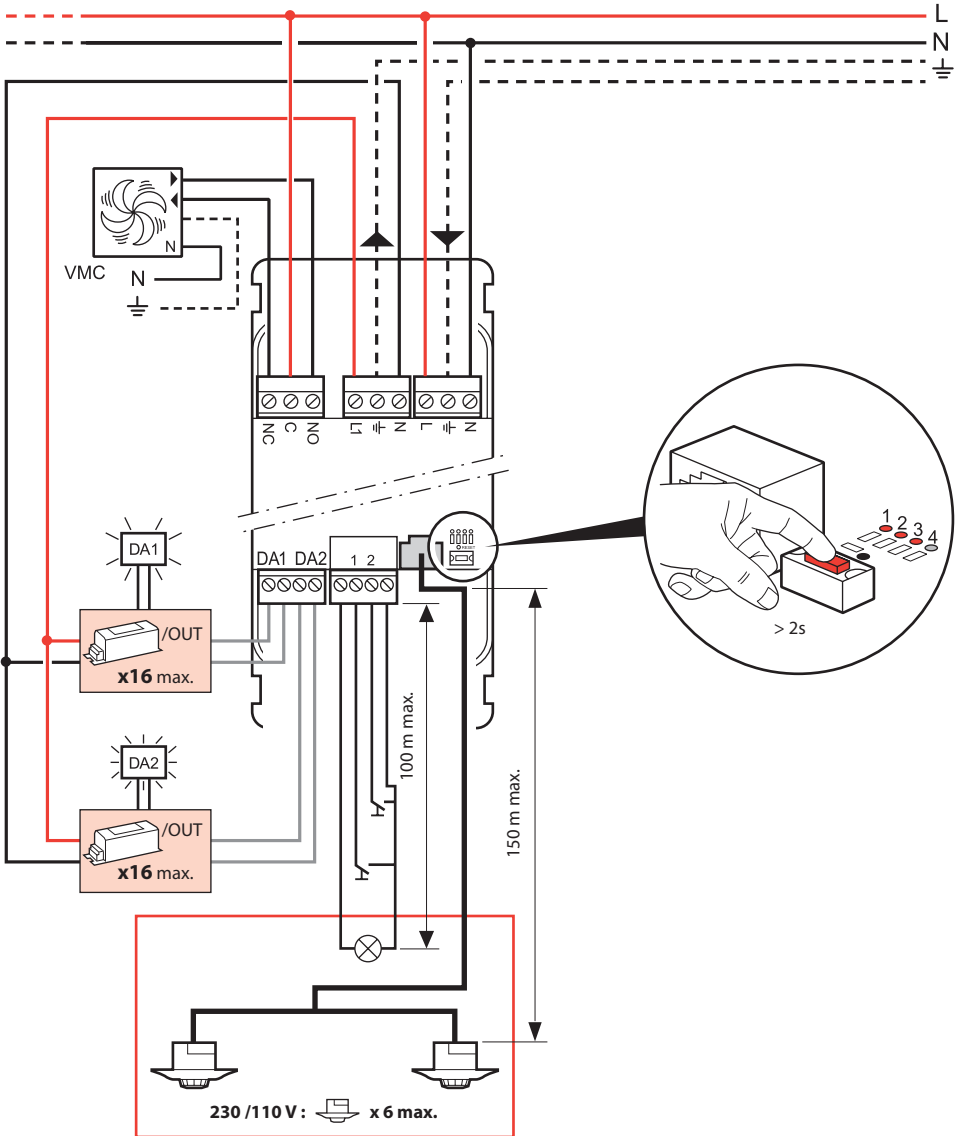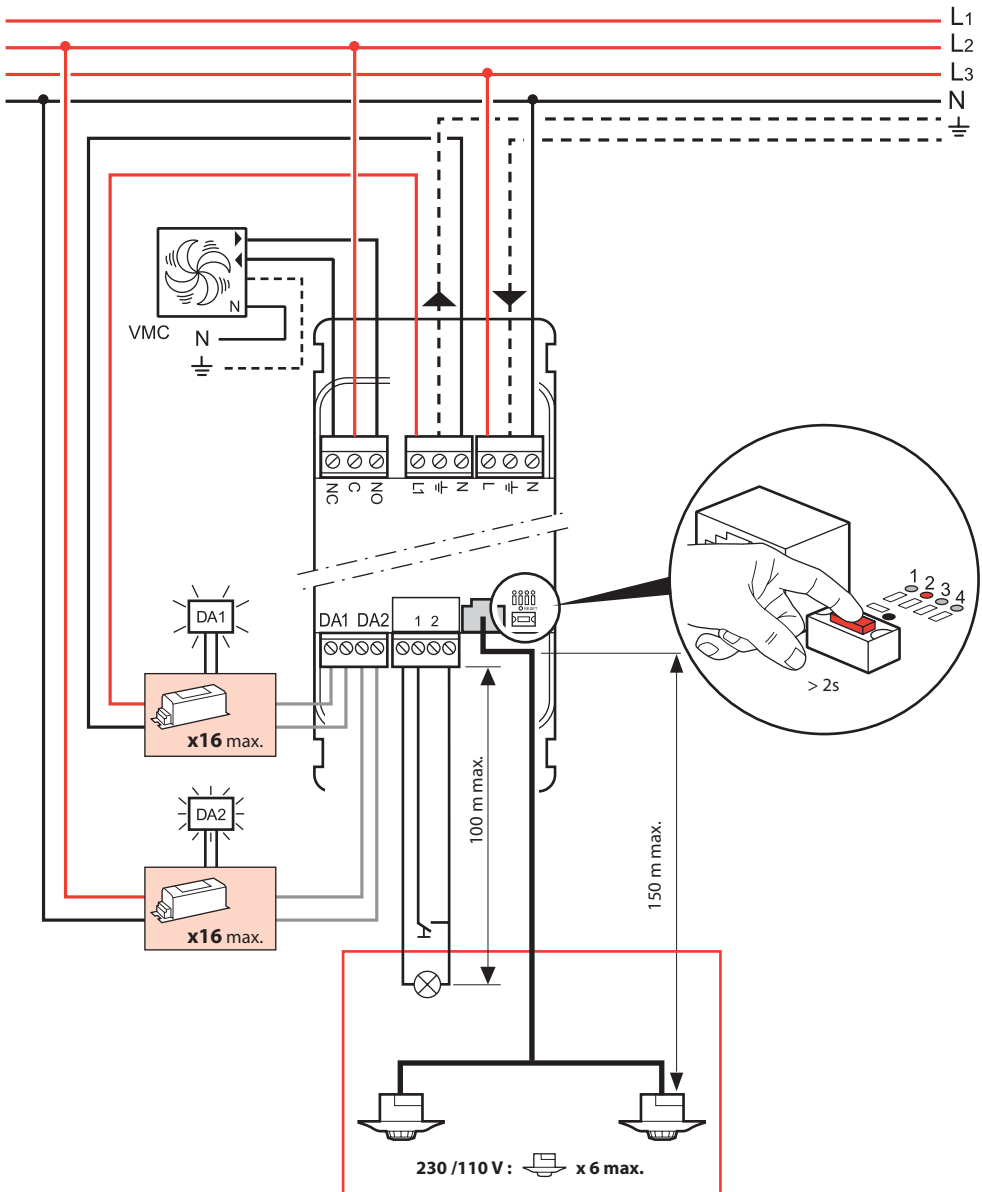


LED

BP DA1


BP DA2



Mode 1 = DA2 = DA1 + 30% ▶ 1 2 3 4
Mode 2 = DA2 = DA1 + 50% ▶ 1 2 3 4
Mode 3 = DA2 = DA1 + 80% ▶ 1 2 3 4




> 2s




Mode 4 = DA1 = DA2 ▶ 1 2 3 4

▶ 1 2 3 4




> 2s




Mode 5 = DA2 = 2/3 DA1 ▶ 1 2 3 4

▶ 1 2 3 4




> 2s


Mode 1 2 3



Mode 4

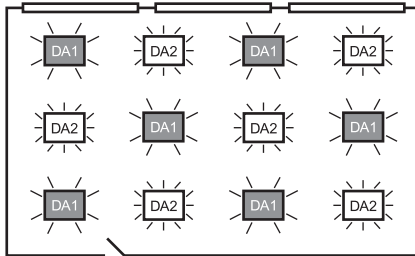


Mode 5




RESET

1



< 2s

2



> 10s

