


# PCE data sheet

|                        |  |
|------------------------|--|
| article#               | <b>282-4v</b>  |
| article description    | <b>CEE-connector 16A 2p 24/42VAC 100-200Hz IP44 TWIST</b>  |
| description long       | CEE-connector 16A 2p 24/42VAC 100-200Hz IP44 TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 2 (2P)<br>clock-position: 4h<br>rated voltage/frequency: 24/42V~ / 100-200Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399084546  |
| country of origin      | AT   |
| customs number         | 85366990   |
| net weight             | 0.177 kg   |
| packaging quantity     | 10   |
| minimum order quantity | 10   |

|                           |                                      |
|---------------------------|--------------------------------------|
| ETIM 7.0                  | EC001320                             |
| IEC-amperage              | 16 A                                 |
| Number of poles           | 2                                    |
| Voltage acc. EN 60309-2   | 20-25 V / 40-50 V (100-200 Hz) green |
| Clock hour position       | 4 h                                  |
| Degree of protection (IP) | IP44                                 |
| Connection system         | Screwed terminal                     |
| Angle of plug             | Straight                             |
| Cable entry               | Swivel                               |
| Material                  | Plastic                              |

|                    |                      |
|--------------------|----------------------|
| a                  | 150 mm               |
| b                  | 75 mm                |
| K (cable Ø)        | 9,5-24 mm            |
| SW                 | 48 mm                |
| wire flexible      | 1-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm              |
| strain relief      | 600 Ncm              |
| dismantling length | 70 mm                |
| stripping length   | 14-16 mm             |

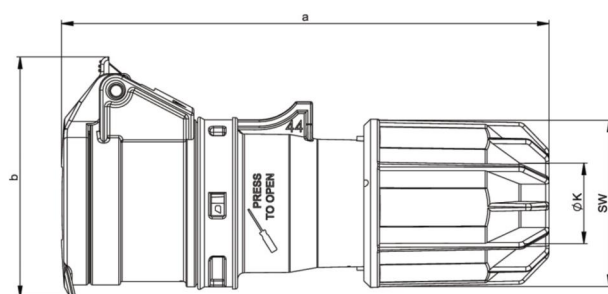

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)