


# PCE data sheet

article#	<b>413-9f66</b>
article description	<b>CEE-flanged socket sloping (62x68mm) 16A 3p 9h IP44/IP54 locking</b>
description long	CEE-flanged socket sloping (62x68mm) 16A 3p 9h IP44/IP54 locking housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 9h rated voltage/frequency: 380-415V~ / 50+60Hz contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 62x68 mm / 47x47 mm lockable with padlock IP protection class: IP44/IP54
GTIN (EAN)	9003399266621
country of origin	AT
customs number	85366990
net weight	0.111 kg
packaging quantity	10

ETIM 7.0	EC001317
IEC-amperage	16 A
Voltage acc. EN 60309-2	380-415 V (50+60 Hz) red
Number of poles	3
Clock hour position	9 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screw terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	68 mm
Drill hole distance vertical	47 mm
Flange size horizontal	62 mm
Drill hole distance horizontal	47 mm

wire flexible	1-2,5 mm <sup>2</sup>
wire solid	1-4 mm <sup>2</sup>
contact screws	100 Ncm
dismantling length	50 mm
stripping length	10-12 mm

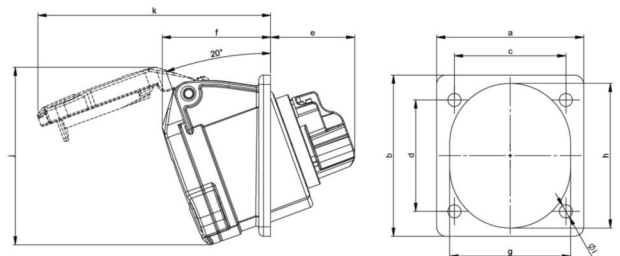

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)