


# PCE data sheet

|                     |  |
|---------------------|--|
| article#            | <b>444-6</b>   |
| article description | <b>CEE-flanged socket sloping (120x130) 125A 4p 6h IP67 POWER TWIST</b>  |
| description long    | CEE-flanged socket sloping (120x130) 125A 4p 6h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 125A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 120x130 mm / 100x108 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN)          | 9003399035371  |
| country of origin   | AT   |
| customs number      | 85366990   |
| net weight          | 0.896 kg   |
| packaging quantity  | 2  |

|                                |                      |
|--------------------------------|----------------------|
| ETIM 7.0                       | EC001317             |
| IEC-amperage                   | 125 A                |
| Voltage acc. EN 60309-2        | 400 V (50+60 Hz) red |
| Number of poles                | 4                    |
| Clock hour position            | 6 h                  |
| Identification colour          | Red                  |
| Degree of protection (IP)      | IP67                 |
| Connection system              | Screwed terminal     |
| Angle of plug                  | Angled               |
| Material                       | Plastic              |
| Contact material               | CuZn                 |
| Surface finish contacts        | Untreated            |
| Flange size vertical           | 130 mm               |
| Drill hole distance vertical   | 108 mm               |
| Flange size horizontal         | 120 mm               |
| Drill hole distance horizontal | 100 mm               |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 16-50 mm <sup>2</sup> |
| wire solid         | 16-70 mm <sup>2</sup> |
| contact screws     | 450 Ncm               |
| dismantling length | 100 mm                |
| stripping length   | 24-27 mm              |

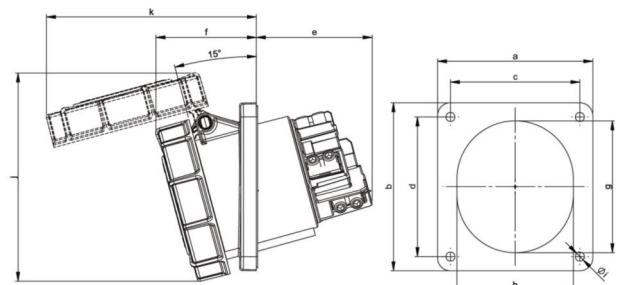

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)