
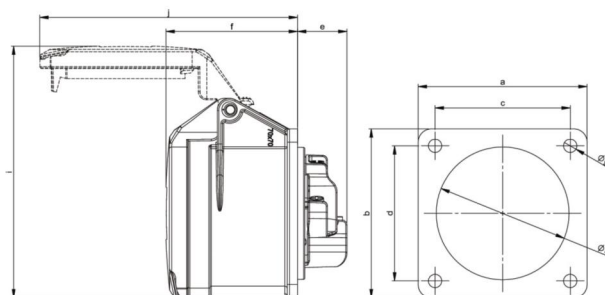


# PCE data sheet

|                     |   |
|---------------------|---|
| article#            | <b>313-4</b>  |
| article description | <b>CEE-flanged socket straight (70x70mm) 16A 3p 4h IP44/IP54</b>  |
| description long    | CEE-flanged socket straight (70x70mm) 16A 3p 4h IP44/IP54<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 70x70 mm / 56x56 mm<br>IP protection class: IP44/IP54 |
| GTIN (EAN)          | 9003399043345   |
| country of origin   | AT  |
| customs number      | 85366990  |
| net weight          | 0.115 kg  |
| packaging quantity  | 10  |

|                                |                         |
|--------------------------------|-------------------------|
| ETIM 7.0                       | EC001317                |
| IEC-amperage                   | 16 A                    |
| Voltage acc. EN 60309-2        | 110 V (50+60 Hz) yellow |
| Number of poles                | 3                       |
| Clock hour position            | 4                       |
| Identification colour          | Yellow                  |
| Degree of protection (IP)      | IP54                    |
| Connection system              | Screw terminal          |
| Angle of plug                  | Straight                |
| Material                       | Plastic                 |
| Contact material               | CuZn                    |
| Surface finish contacts        | Untreated               |
| Flange size vertical           | 70 mm                   |
| Drill hole distance vertical   | 56 mm                   |
| Flange size horizontal         | 70 mm                   |
| Drill hole distance horizontal | 56 mm                   |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| contact screws     | 100 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

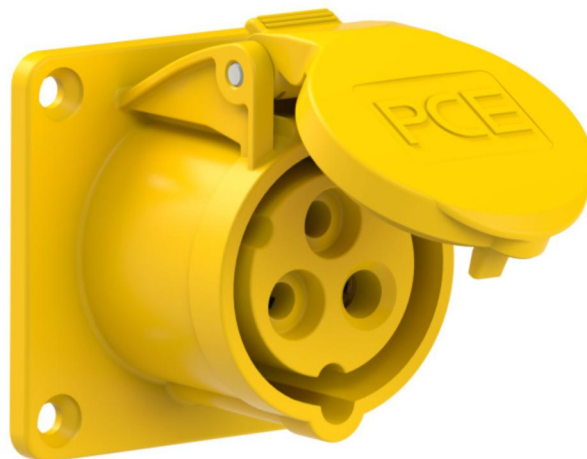

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)