


## SCS 36 1500 (763 611)

- For use as operating stick for inserting insulating protective shutters
- Handle termination with end cap



Figure without obligation

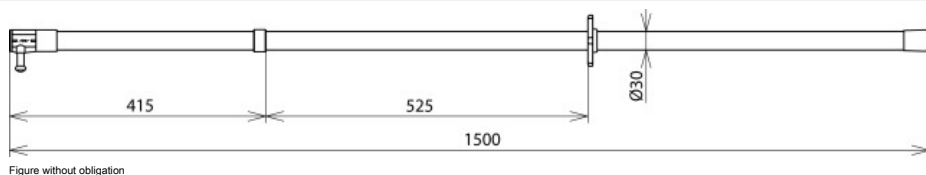

Type	SCS 36 1500
Part No.	763 611
Nominal voltage (U <sub>N</sub> )	1 ... 36 kV
Max. load on the operating head	7.5 kg
Total length (l <sub>Σ</sub> )	1500 mm
Insulating clearance (l <sub>i</sub> )	525 mm
Length (handle) (l <sub>h</sub> )	560 mm
Insertion depth (l <sub>o</sub> )	415 mm
Standard (switching stick head)	DIN VDE V 0681-2
Standard (switching stick)	DIN VDE V 0681-1 and -2
Standard (insulating stick)	DIN VDE V 0681-1
For use at	*
For	For indoor and outdoor installations
Design	Fully insulated, massive switching stick head
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (switching pin)	Steel, plastic-sheathed
Diameter	30 mm
Anti-rotation plug-in coupling including end fitting	No
Type of device	Switching stick
Weight	610 g
Customs tariff number (Comb. Nomenclature EU)	82055980
GTIN	4013364076921
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.