


IS 72.5 SQ SN7743 (766 312)

- For use as switching, operating and earthing stick
- Handle closed with end cap

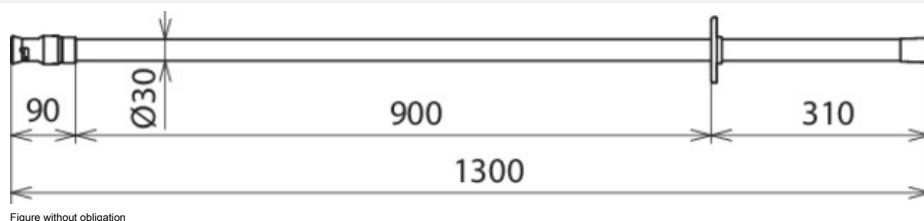

Type	IS 72.5 SQ SN7743
Part No.	766 312
Nominal voltage (U _N)	1 ... 72.5 kV
Total length (l _Σ)	1300 mm
Insulating clearance (l _i)	900 mm
Handle length (l _H)	310 mm
Insertion depth (l _o)	90 mm
Standard (insulating stick)	E DIN VDE V 0681-1
For	Indoor and outdoor installations
Material	Glass-fibre reinforced polyester tube
Diameter	30 mm
For use at	*
Supporting head for	T pin shaft
Anti-rotation plug-in coupling including end fitting	No
Type of device	Insulating stick
Weight	540 g
Customs tariff number (Comb. Nomenclature EU)	82055980
GTIN	4013364311985
PU	1 pc(s)

^{*)} Max. shutter weight when inserting insulating protective shutters

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.