


## EKV4u0 95 G VABRSSE (VABRSSE)

- Anti-rotation crimped cable lugs (type PK1)
- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator

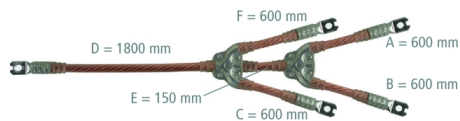

| Type                                            | EKV4u0 95 G VABRSSE                                               |
|-------------------------------------------------|-------------------------------------------------------------------|
| Part No.                                        | VABRSSE                                                           |
| Version                                         | Four-pole                                                         |
| Cable cross-section (phase side)                | 95 mm <sup>2</sup>                                                |
| Cable cross-section (earth side)                | 95 mm <sup>2</sup>                                                |
| Length of phase cable A                         | 600 mm                                                            |
| Length of phase cable B                         | 600 mm                                                            |
| Length of phase cable C                         | 600 mm                                                            |
| Length of phase cable F                         | 600 mm                                                            |
| Length of earthing cable                        | 1800 mm                                                           |
| Cable cross-section                             | 95 mm <sup>2</sup>                                                |
| Fully insulated                                 | No                                                                |
| Max. short-circuit current I <sub>k</sub> 0.5 s | 26.5 kA                                                           |
| Max. short-circuit current I <sub>k</sub> 1 s   | 18.7 kA                                                           |
| Crimped cable lug                               | PK1                                                               |
| Standard                                        | EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range                               | -25 °C ... +55 °C                                                 |
| Material (cable)                                | E-Cu, extra finely stranded and highly flexible                   |
| Material (sheath)                               | Thermoplastic polymer (flexible PVC compound YM2)                 |
| Hole (cable lug)                                | Ø12.5 mm                                                          |
| Weight                                          | 6,65 kg                                                           |
| Customs tariff number (Comb. Nomenclature EU)   | 85359000                                                          |
| GTIN                                            | 4013364164048                                                     |
| PU                                              | 1 pc(s)                                                           |

**Attention: Please state the relevant Variant No. when ordering.**

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.