



**SPK 27.89 BRS AK1X10 2X6.8 GSG V2A (540 199)**


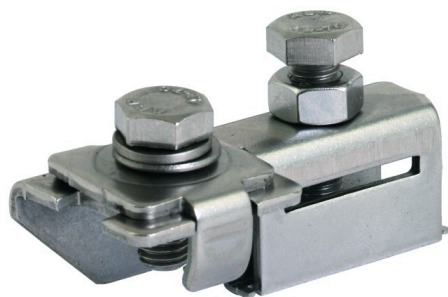


Figure without obligation



For combination with endless tensioning strap (Part No. 540 901), connection cross-section 4-50 mm<sup>2</sup> (solid / stranded).



Arrangement:

Type	SPK 27.89 BRS AK1X10 2X6.8 GSG V2A
Part No.	540 199
Material	StSt
Screw	M8 x 20 mm
Material of screw	StSt
Connection Rd	1 x 10 mm / 1-2 x 6-8 mm
Connection (solid / stranded)	4-50 mm <sup>2</sup>
Lightning current carrying capability (10/350 μs)	100 kA <sup>*)</sup>
Standard	EN 62561-1
Weight	107 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364304741
PU	25 pc(s)

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.