

## KS SK A NS VP33XYL (VP33XYL)

- Short-circuiting bars can be configured online via the earthing and short-circuiting configurator

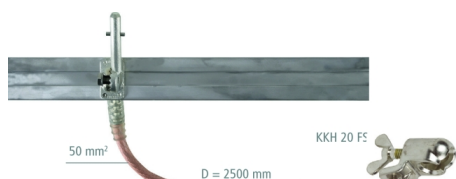


Figure without obligation




Figure without obligation

| Type  | KS SK A NS VP33XYL              |
|---|---------------------------------|
| Part No.                                      | VP33XYL                         |
| Application                                   | LV                              |
| Coupling mechanism                            | SK                              |
| Position of the coupling mechanism ( $l_H$ )  | 175 mm                          |
| Profile                                       | 60 x 12 mm                      |
| Height  | 60 mm                           |
| Width   | 12 mm                           |
| Total length ( $l_G$ )                        | 500 mm                          |
| Bar spacing ( $S_A$ )                         | 150 mm                          |
| Max. short-circuit current $I_k$ 0.5 s        | 90 kA                           |
| Max. short-circuit current $I_k$ 1 s          | 64 kA                           |
| For   | Low-voltage installations       |
| Standard                                      | EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range                             | -25 °C ... +55 °C               |
| Material (Short-Circuiting Bar)               | Aluminium                       |
| Material (cable)                              | Highly flexible copper          |
| Cable cross-section                           | 50 mm <sup>2</sup>              |
| Cable length                                  | 2500 mm                         |
| Weight  | 10 kg                           |
| Customs tariff number (Comb. Nomenclature EU) | 85359000                        |
| GTIN  | 4013364450875                   |
| PU  | 1 pc(s)                         |

**Important:** Please state the unique Variant No. when ordering.

**Note:** Other types can be configured online via the earthing and short-circuiting configurator

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Two coupling mechanisms are required for a total length > 1000 mm.

**Note:** When ordering, please specify the Variant No. generated online via the earthing and short-circuiting configurator.