

MVS 1 4 8 TT (900 849)

- Allows compact interconnection of the arresters
- Suitable for installation in a TT system for a shock-proof connection of the neutral potential of the arresters

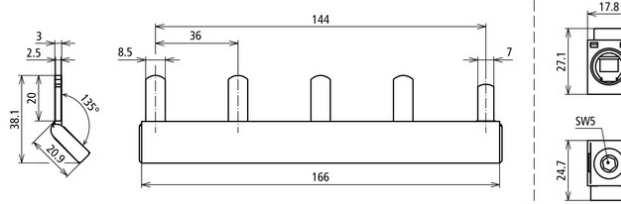
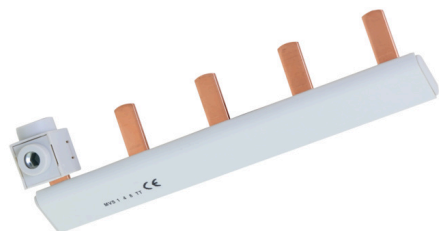


Figure without obligation

Modular wiring clip for TT systems, insulated, single-phase, four-pole with connection clamp up to 50 mm².

Type	MVS 1 4 8 TT
Part No.	900 849 <small>NEW</small>
Type	Single-phase
Number of contact studs	4
Dimensions	166 x 38.1 x 22 mm
Max. lightning current (10/350 μ s) based on DIN EN 61643-11 (I_{imp})	100 kA
Material of the electrical conductor	E-Cu-ETP
Insulation material	PC
Cross-sectional area of the feed terminal	10–50 mm ² (solid or stranded) / 6–35 mm ² (flexible with wire end ferrule)
Max. tightening torque of the clamping screw	7 Nm
Insulated design	Yes
Screw width of clamping screw	Hexagon socket 5
Weight	118 g
Customs tariff number (Comb. Nomenclature EU)	85369001
GTIN	4013364473348
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.