

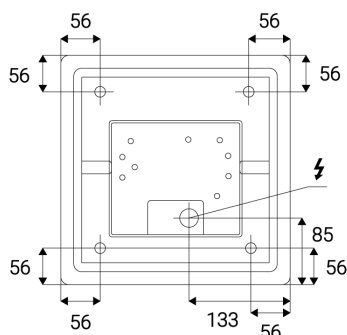


# SOLO, A HF

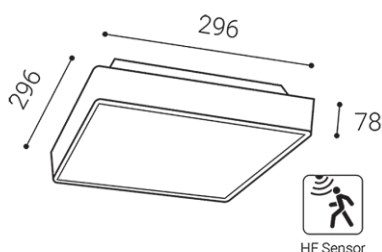

|                                    |                          |
|------------------------------------|--------------------------|
| <b>Name</b>                        | SOLO, A HF               |
| <b>Code</b>                        | 5200254                  |
| <b>Color</b>                       | ANTRACITE / RAL 7024     |
| <b>Power</b>                       | 16W ± 10 %               |
| <b>Lumen output</b>                | 1100lm ± 10 %            |
| <b>Color temperature</b>           | 3000K/4000K/6500K        |
| <b>Efficacy</b>                    | 69lm/W                   |
| <b>Driver</b>                      | 500 mA                   |
| <b>Electrical insulation class</b> | <input type="checkbox"/> |
| <b>Voltage / Frequency</b>         | 220-240V/50-60Hz         |
| <b>Color Rendering Index</b>       | 80+                      |
| <b>SDCM</b>                        | < 3                      |
| <b>Light beam angle</b>            | 160°                     |
| <b>Unified Glare Rating</b>        | N/A                      |
| <b>Light source</b>                | LED                      |
| <b>Dimmable</b>                    | ON REQUEST               |
| <b>LED Lifetime</b>                | L80 B20 30.000h 25°C     |
| <b>Warranty</b>                    | 5 YEAR                   |
| <b>Ingress Protection</b>          | IP 65                    |
| <b>Material</b>                    | ABS/PC                   |

## Product

Name  
SOLO, A HF

Code  
5200254

Color  
ANTRACITE / RAL 7024

## Power

Power  
16W ± 10 %

Lumen output  
1100lm ± 10 %

Color temperature  
3000K/4000K/6500K

Efficacy  
69lm/W

Driver  
500 mA

Electrical insulation class

Voltage / Frequency  
220-240V/50-60Hz

## Information

Color Rendering Index  
80+

SDCM  
< 3

Light beam angle  
160°

Unified Glare Rating  
N/A

Light source  
LED

Dimmable  
ON REQUEST

LED Lifetime  
L80 B20 30.000h 25°C

Warranty  
5 YEAR

## Other data

Ingress Protection  
IP 65

Material  
ABS/PC

## EN

Outdoor square surface mounted light fitting equipped with SMD LED and microwave motion sensor. Housing and diffuser made of polycarbonate. Available in anthracite color. Application: general outdoor lighting (entrance, terrace, stairs)

## DE

Quadratische Aufbauleuchte für den Außenbereich mit SMD-LED und Mikrowellen-Bewegungssensor. Gehäuse und Diffusor aus Polycarbonat. Erhältlich in Anthrazit. Anwendung: allgemeine Außenbeleuchtung (Eingang, Terasse, Pergola)

## CZ

Vonkavní čtvercové svítidlo na povrch. Světelný zdroj - SMD LED a mikrovlnný snímač pohybu. Svítidlo a difúzor jsou vyrobeny z polykarbonátu. K dispozici v antracitové barvě. Použití: obecné venkovní osvětlení (vchod, terasa, schody)

## SK

Vonkajšie hranaté svietidlo. Svetelný zdroj - SMD LED a mikrovlnný pohybový senzor. Svietidlo aj difúzor sú vyrobené z polykarbonátu. K dispozícii v antracitovej farbe. Použitie: všeobecné vonkajšie osvetlenie (vchod, terasa, schodiská)