


OLLI, W

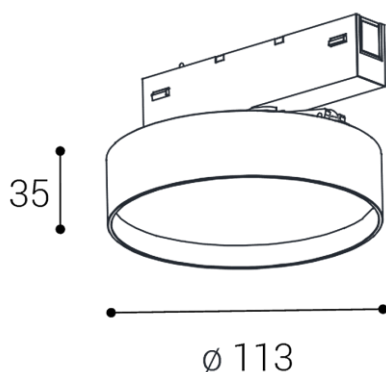

Name	
Code	
Color	
Power	
Lumen output	
Color temperature	
Efficacy	
Driver	
Electrical insulation class	
Voltage / Frequency	

Color Rendering Index	
SDCM	
Light beam angle	
Unified Glare Rating	
Light source	
Dimmable	
LED Lifetime	
Warranty	
Ingress Protection	
Material	

Product

Name	OLLI, W
Code	6301131D
Color	WHITE / RAL 9016

Power

Power	12W ± 10 %
Lumen output	1000lm ± 10 %
Color temperature	3000K
Efficacy	84lm/W
Driver	350 mA



Electrical insulation class	
Voltage / Frequency	220-240V/50-60Hz

Information

Color Rendering Index	90+
SDCM	< 3
Light beam angle	100°
Unified Glare Rating	N/A
Light source	LED
Dimmable	DALI/PUSH
LED Lifetime	L80B20 50.000h 25°C
Warranty	5 YEAR

Other data

Ingress Protection	IP 20
Material	ALUMINIUM/PC

EN

Compact diffused luminaire designed for mounting in 3-circuit rails. Available in white and black. Use: thanks to the variability of the luminaire, it is especially suitable for diffuse lighting of spaces (shops, libraries, galleries, shops)

DE

Kompakte diffuse Leuchte für die Montage in 3-Phasen-Schienen. Erhältlich in weiß und schwarz. Verwendung: dank der Variabilität der Leuchte besonders geeignet für die diffuse Beleuchtung von Räumen (Geschäfte, Bibliotheken, Galerien, Shops)

CZ

Kompaktní difúzní svítidlo určené pro montáž do 3-okruhových lišt. Dostupné v bílé a černé barvě. Použití: díky variabilitě svítidla je vhodné zejména na difúzní osvětlení prostor (obchody, knihovny, galerie, prodejny)

SK

Kompaktné difúzne svietidlo určené pre montáž do 3-okruhových lišt. Dostupné v bielej a čiernej farbe. Použitie: vďaka variabilite svietidla je vhodné najmä na difúzne osvetlenie priestorov (obchody, knižnice, galérie, predajne)