
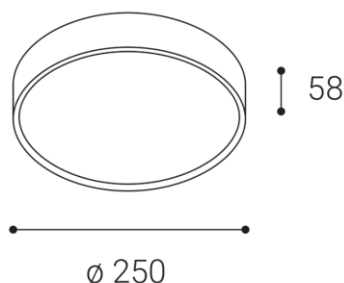


MIRA 25, B

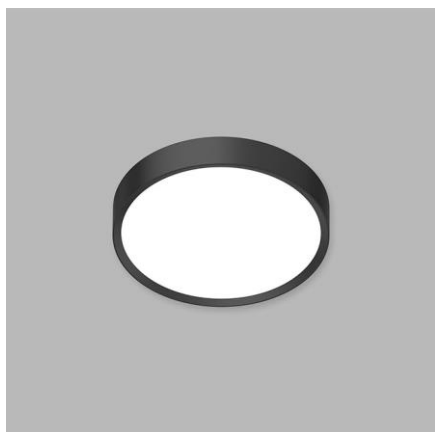

Name	MIRA 25, B
Code	1234253
Color	BLACK / RAL 9005
Power	9-18W ± 10 %
Lumen output	750-1850lm ± 10 %
Color temperature	3000K/4000K/5700K
Efficacy	103lm/W
Driver	230-450 mA
Electrical insulation class	
Voltage / Frequency	220-240V/50-60Hz
Color Rendering Index	80+
SDCM	< 3
Light beam angle	110°
Unified Glare Rating	N/A
Light source	LED
Dimmable	ON/OFF
LED Lifetime	L80B20 50.000h 25°C
Warranty	5 YEAR
Ingress Protection	IP 65
Material	ALUMINIUM/PC

Product

MIRA 25, B
1234253
BLACK / RAL 9005

Power

9-18W ± 10 %
750-1850lm ± 10 %
3000K/4000K/5700K
103lm/W

230-450 mA



220-240V/50-60Hz

Information

80+
< 3
110°
N/A
LED
ON/OFF
L80B20 50.000h 25°C
5 YEAR

Other data

IP 65
ALUMINIUM/PC

EN

Outdoor round surface mounted light fitting equipped with SMD LED. Housing made of aluminium, Diffusor in polycarbonate.

Available in white and black color, including dimmable versions.

Application:

general outdoor lighting (entrance, terrace, pergola)

DE

Runde Aufbauleuchte für den Außenbereich mit SMD-LED. Gehäuse aus Aluminium, Diffusor aus Polycarbonat.

Erhältlich in Weiß und Schwarz, einschließlich dimmbarer Versionen.

Anwendung:

allgemeine Außenbeleuchtung (Eingang, Terrasse, Pergola)

CZ

Venkovní kulaté svítidlo. Světelný zdroj - LED SMD.

Svítidlo je vyrobeno z hliníku, difúzor z polykarbonátu.

K dispozici v bílé a černé barvě, včetně stmívatelných verzí.

Použití:

obecné venkovní osvětlení (vchod, terasa, pergola)

SK

Vonkajšie kruhové svietidlo. Svetelný zdroj - SMD LED.

Svietidlo je vyrobené z hliníka, difúzor z polykarbonátu.

K dispozícii v bielej a čiernej farbe, vrátane stmievateľných verzí.

Použitie:

všeobecné vonkajšie osvetlenie (vchod, terasa, pergola)

