
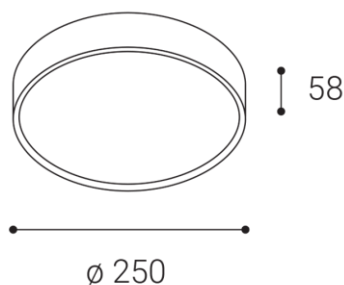


# MIRA 25, B

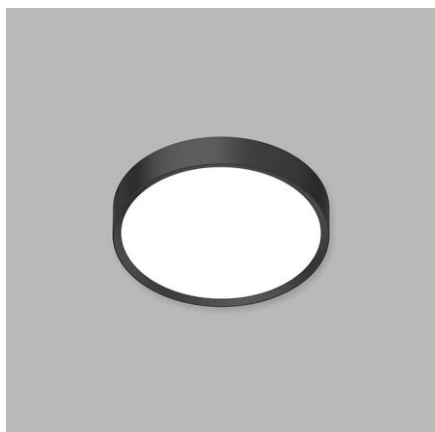

<b>Name</b>	MIRA 25, B
<b>Code</b>	1234253D
<b>Color</b>	BLACK / RAL 9005
<b>Power</b>	18W ± 10 %
<b>Lumen output</b>	1850lm ± 10 %
<b>Color temperature</b>	3000K/4000K/5700K
<b>Efficacy</b>	103lm/W
<b>Driver</b>	460 mA
<b>Electrical insulation class</b>	
<b>Voltage / Frequency</b>	220-240V/50-60Hz
<b>Color Rendering Index</b>	80+
<b>SDCM</b>	< 3
<b>Light beam angle</b>	110°
<b>Unified Glare Rating</b>	N/A
<b>Light source</b>	LED
<b>Dimmable</b>	DALI/PUSH
<b>LED Lifetime</b>	L80B20 50.000h 25°C
<b>Warranty</b>	5 YEAR
<b>Ingress Protection</b>	IP 65
<b>Material</b>	ALUMINIUM/PC

## Product

MIRA 25, B  
1234253D  
BLACK / RAL 9005

## Power

18W ± 10 %  
1850lm ± 10 %  
3000K/4000K/5700K  
103lm/W  
460 mA



220-240V/50-60Hz

## Information

80+  
< 3  
110°  
N/A  
LED  
DALI/PUSH  
L80B20 50.000h 25°C  
5 YEAR

## Other data

IP 65  
ALUMINIUM/PC

## EN

Outdoor round surface mounted light fitting equipped with SMD LED. Housing made of aluminium, Diffusor in polycarbonate.

Available in white and black color, including dimmable versions.

Application:

general outdoor lighting (entrance, terrace, pergola)

## DE

Runde Aufbauleuchte für den Außenbereich mit SMD-LED. Gehäuse aus Aluminium, Diffusor aus Polycarbonat.

Erhältlich in Weiß und Schwarz, einschließlich dimmbarer Versionen.

Anwendung:

allgemeine Außenbeleuchtung (Eingang, Terrasse, Pergola)

## CZ

Venkovní kulaté svítidlo. Světelný zdroj - LED SMD.

Svítidlo je vyrobeno z hliníku, difúzor z polykarbonátu.

K dispozici v bílé a černé barvě, včetně stmívatelných verzí.

Použití:

obecné venkovní osvětlení (vchod, terasa, pergola)

## SK

Vonkajšie kruhové svietidlo. Svetelný zdroj - SMD LED.

Svietidlo je vyrobené z hliníka, difúzor z polykarbonátu.

K dispozícii v bielej a čiernej farbe, vrátane stmievateľných verzí.

Použitie:

všeobecné vonkajšie osvetlenie (vchod, terasa, pergola)

