

SHUNT TRIP LEFT FOR ELECTRICAL INTERLOCKING 24 V DC  
ACCESSORY FOR 3VA1 and 3VA20 up to 3VA25



Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Auxiliary release
Accessories	Auxiliary release
General technical data	
Degree of pollution	3
Overvoltage category	III
Voltage	
Rated insulation voltage $U_i$	690 V
Surge voltage resistance	4 kV
Control supply voltage ( $U_s$ ) / at DC	24 V
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
Number of slots	3
Depth	31.2 mm
Net weight	91 g

Tightening torque / with screw-type terminals / minimum	0.4 N·m
Tightening torque / with screw-type terminals / maximum	0.5 N·m




### Connections according IEC


Wire stripping length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16

### Connections according UL

Wire stripping length [in]	0.4 in
Tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
Tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in

### Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates
 VDE	 EAC	 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>

Shipping Approval	other
 LRS	<a href="#">Manufacturer Declaration</a> <a href="#">Miscellaneous</a>

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BM10>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BM10>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9988-0BM10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BM10)

#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>

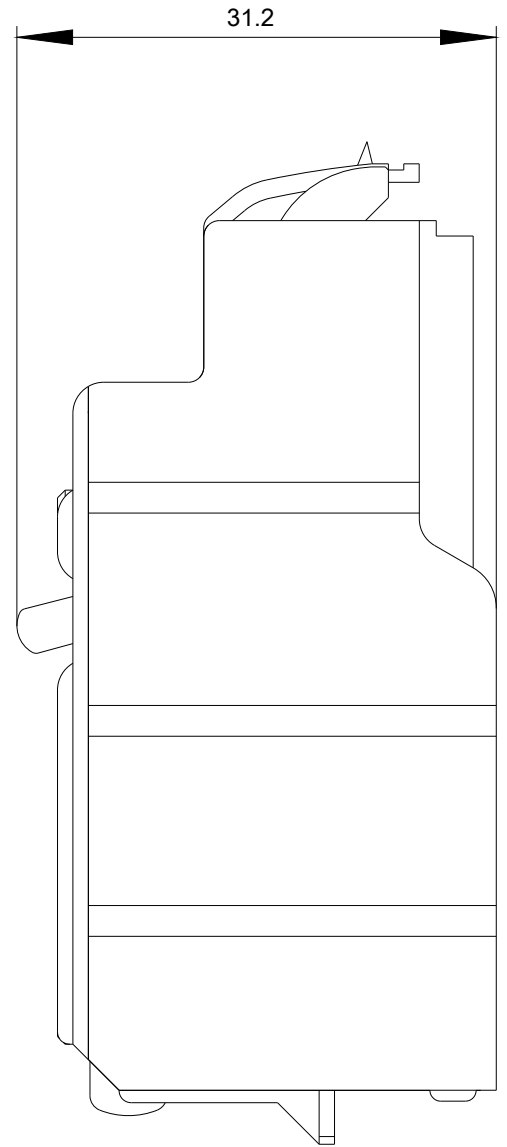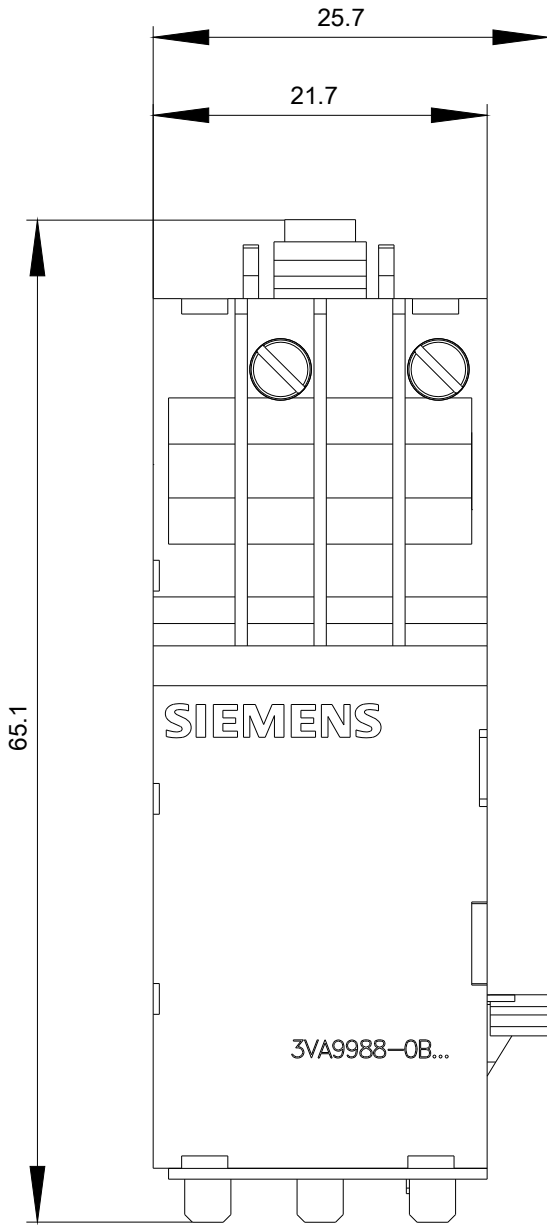

**last modified:**

08/08/2020