

residual current device RCD820 advanced RCD type A load side mounted rated resid. current 0.03...30A at 50/60Hz adjustable tv 0...10000ms 3-pole In=160A Ue=100-690V accessory for: 3VA2




Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Residual current protection module type A
Product group primary device	3VA21
General technical data	
Mounting type	screw fixing
Number of poles	3
Protection class IP / on the front	IP40
Current	
Current / at AC / rated value	160 A
Response value / of the residual current	0.03;0.05;0.1;0.3;0.5;1;3;5;10;30
Mechanical Design	
Product function	
<ul style="list-style-type: none"> • communication with residual current device 	Yes
<ul style="list-style-type: none"> • Product function / Integrated / alarm management 	Yes

<ul style="list-style-type: none"> • Product function / Integrated / alarm management 	Pre-alarm indication 30% and 60%
<ul style="list-style-type: none"> • Product function / remote tripping 	Yes
<ul style="list-style-type: none"> • Functionality/sealable 	Yes
<ul style="list-style-type: none"> • Product function / selectable tripping characteristic 	No
<ul style="list-style-type: none"> • Product function / selectable RCD or monitoring mode 	Yes
Remote reset function	Yes
Position / of the infeed / on the RCD component	Top or bottom
Type of electrical connection / for main current circuit	busbar connection
Setting values / of the limit value of not tripping time	0;0.06;0.15;0.3;0.5;1.0;2.0;3.0;5.0;10.0
Type of trip indicator / electrical	Yes
Type of trip indicator / communication	Yes
Power loss [W] / maximum	10 W
Rated frequency	60 Hz
Operating frequency	50/60Hz
Height	115 mm
Width	105 mm
Depth	86 mm
Net weight	1 317 g
Ambient temperature / during operation	
<ul style="list-style-type: none"> • minimum 	-25 °C
<ul style="list-style-type: none"> • maximum 	70 °C

Certificates

General Product Approval	EMC	Declaration of Conformity
 CCC	 VDE	<p style="text-align: center;">Miscellaneous</p>  EAC
		 RCM
		 EG-Konf.

Shipping Approval	other
 LRS	<p style="text-align: center;">Manufacturer Declaration</p> <p style="text-align: center;">Miscellaneous</p>

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9123-0RL30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9123-0RL30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9123-0RL30

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

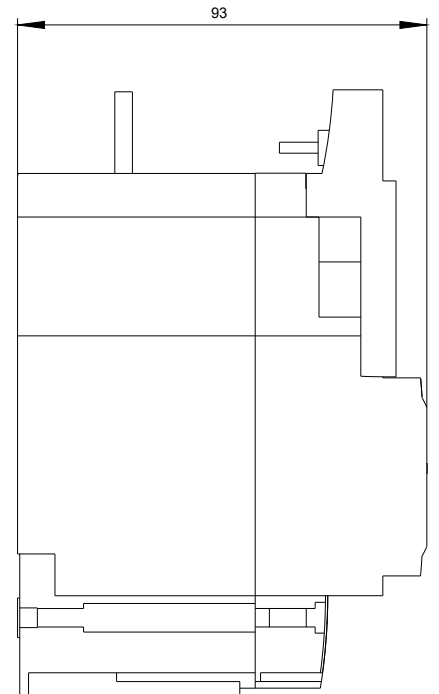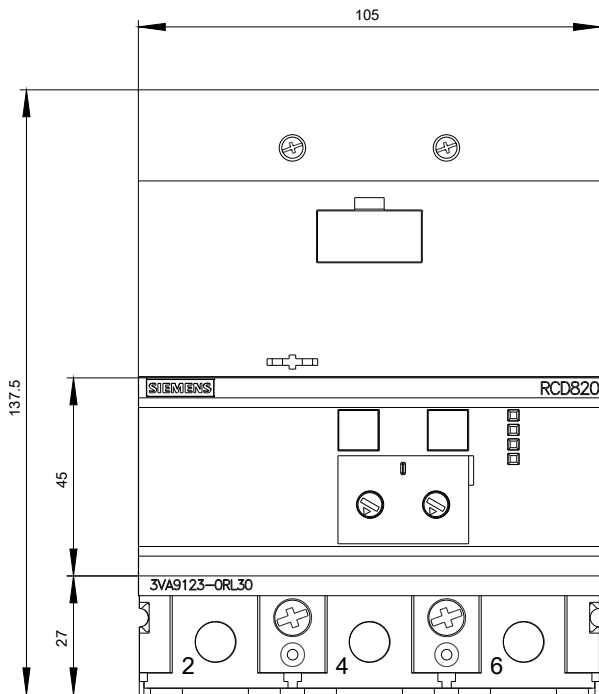

-A1

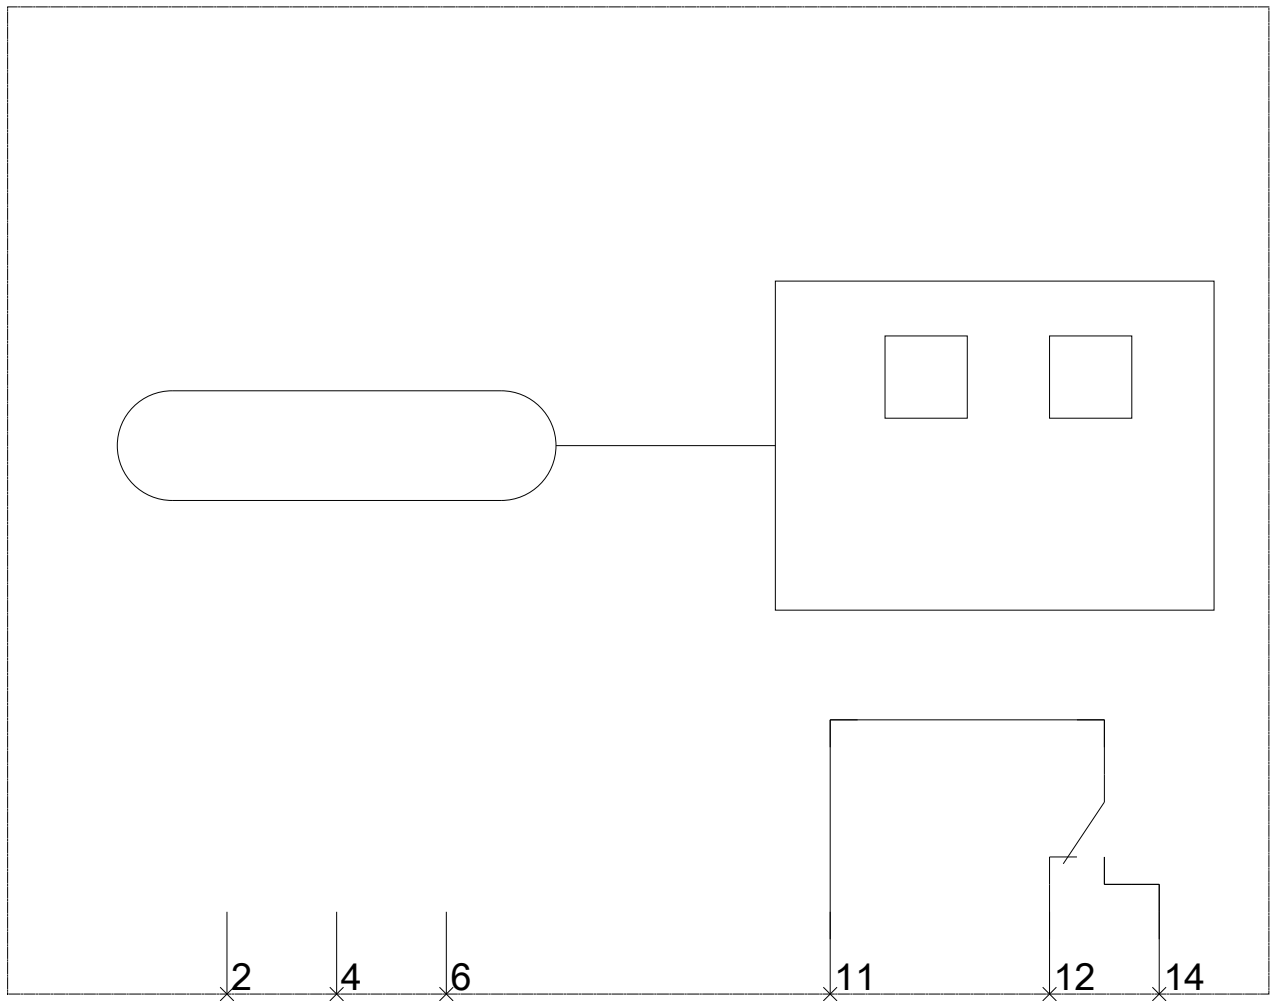

last modified:

08/08/2020