
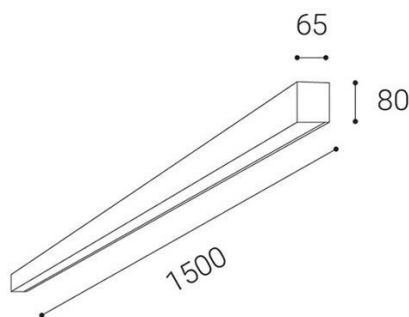


LINO 150 P, B

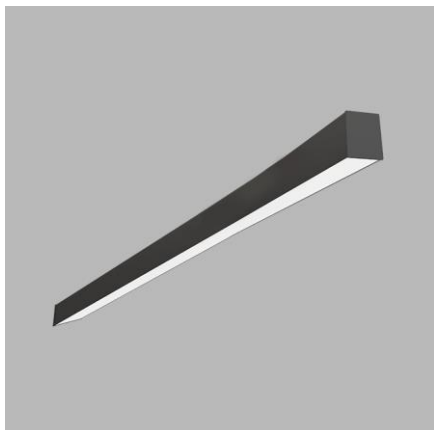

Pin1	Pin2	Pin3	Pin4	Currents (mA)	W
OFF	OFF	OFF	OFF	800	31
ON	OFF	OFF	OFF	850	33
ON	ON	OFF	OFF	900	35
ON	ON	ON	OFF	950	37
ON	ON	ON	ON	1000	39

Name	LINO 150 P, B
Code	1310553
Color	BLACK
Category	CEILING
Power	31-39 W ± 10 %
Lumen output	3570-4490 lm ± 10 %
Color temperature	3CCT 3000K/3500K/4000K
Efficacy	115 lm/W
Driver	800-1000 mA
Electrical insulation class	Ⓛ
Voltage/frequency	220-240V/50-60Hz

Color Rendering Index	80+
SDCM	< 3
Light beam angle	160°
Unified Glare Rating	PRISMA DIFFUSER <19
Light source	LED
Dimmable	N/A
LED Lifetime	L90B10 50.000h 25°C
Warranty	5 YEAR
Ingress Protection	20
Material	ALUMINIUM/PMMA

Product

LINO 150 P, B

1310553

BLACK

CEILING

Power

31-39 W ± 10 %

3570-4490 lm ± 10 %

3CCT 3000K/3500K/4000K

115 lm/W

800-1000 mA



220-240V/50-60Hz

Information

80+

< 3

160°

PRISMA DIFFUSER <19

LED

N/A

L90B10 50.000h 25°C

5 YEAR

Other data

20

ALUMINIUM/PMMA

EN

Linear surface light fitting for interior mounting, equipped with SMD LEDs. Slim design with screwless endcaps. Housing made of aluminium, opal or microprismatic diffuser.

Available in 3 lengths, white and black color.

Application:

general lighting, intended for residential or commercial areas (livingrooms, guest or bedrooms, entrance areas, kitchen, receptions)

DE

Lineare Leuchte für die Deckenmontage im Innenraum, ausgestattet mit SMD-LEDs. Schlankes Design mit schraubenlosen Anschlüssen.

Aluminiumgehäuse, opaler oder mikroprismatischer Diffusor. Verfügbar in 3 Längen, in weiß und schwarz.

Anwendung:

Allgemeinbeleuchtung für Wohn oder Geschäftsräume (Räume, Schlafzimmer, Schränke, Empfang, Eingangsbereiche, Küche, Büros)

CZ

Lineární svítidlo určené pro stropní montáž do interiéru. Světelný zdroj - SMD LED. Štíhlý design s bezšroubovými koncovkami. Svítidlo je vyrobené z hliníku, opalový nebo mikroprizmatický difúzor.

K dispozici ve 3 různých velikostech, bílé a černé barvě.

Použití:

všeobecné osvětlení určené pro obytné nebo komerční prostory (pokoje, ložnice, skříně, vstupní prostory, kuchyně, recepcie, kanceláře)

SK

Lineárne svietidlo určené pre montáž na strop do interiéru. Svetelný zdroj - SMD LED diódy. Štíhly dizajn s bezšrutkovými koncovkami. Svietidlo je vyrobené z hliníku, opalový alebo mikroprizmatický difúzor.

K dispozícii v 3 rôznych veľkostiach, bielej a čiernej farbe.

Použitie:

všeobecné osvetlenie určené pre obytné alebo komerčné priestory (izby, spálne, šatníky, vstupné priestory, kuchyňa, recepcie, kancelárie)

