

## PHE3 3 10 S ZK (767 941)

- Easy transport due to detachable insulating stick (ZK) and test prod
- Insulating stick with plug-in coupling for extending the handle

Figure without obligation

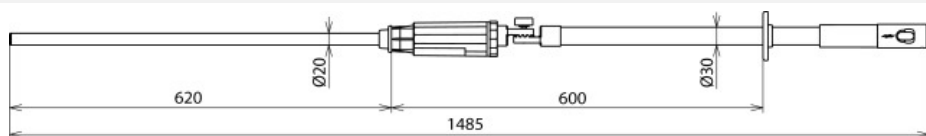


Figure without obligation

| Type  | PHE3 3 10 S ZK                              |
|---|---|
| Part No.                                      | 767 941                                     |
| Nominal voltage (U <sub>n</sub> )             | 3 ... 10 kV                                 |
| Type of voltage                               | a.c.  |
| Frequency                                     | 50 Hz                                       |
| Category                                      | S 62  |
| Total length (l <sub>o</sub> )                | 1485 mm                                     |
| Insertion depth (l <sub>i</sub> )             | 620 mm                                      |
| Length (indicator with test prod)             | 850 mm                                      |
| Standard                                      | EN/IEC 61243-1 (DIN VDE 0682-411)           |
| Temperature range                             | -25 °C ... +55 °C, climatic category N      |
| Design  | Complete                                    |
| For use at                                    | ▲   |
| For   | Indoor and outdoor installations            |
| Application                                   | Switchgear installations and overhead lines |
| Design  | Single-pole                                 |
| Indication                                    | Acoustic and visual                         |
| Self-testing element                          | Yes   |
| Material (test electrode)                     | Copper alloy/gal Sn                         |
| Material (test prod)                          | Glass-fibre reinforced epoxy resin tube     |
| Material (indicator)                          | Plastic, fully insulated                    |
| Material (insulating stick)                   | Glass-fibre reinforced polyester tube       |
| Weight  | 1,17 kg                                     |
| Customs tariff number (Comb. Nomenclature EU) | 90303370                                    |
| GTIN  | 4013364134782                               |
| PU  | 1 pc(s)                                     |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.