


PHE4 110 132 S 16.7 50 (783 460)

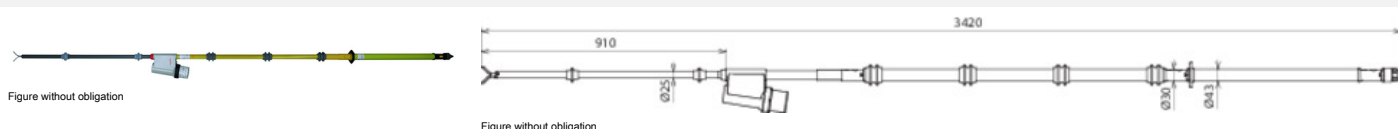

| Type | PHE4 110 132 S 16.7 50 |
|---|--|
| Part No. | 783 460 |
| Nominal voltage (U _N) | 110 ... 132 kV |
| Type of voltage | a.c. |
| Frequency | 50 & 16.7 Hz |
| Category | S |
| Total length (l _Σ) | 3420 mm |
| Insertion depth (l _o) | 910 mm |
| Length (handle) (l _h) | 780 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +70 °C, climatic category N and W |
| Design | Complete |
| For use in wet weather conditions | Yes |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Design | Single-pole |
| Indication | Acoustic and visual |
| Sound level | > 67 dB(A) (visual indication and intermittent sound signal) |
| Self-testing element *) | yes |
| Battery | Lithium AA 1.5 Volt |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Diameter (insulating stick) | 30 mm |
| Weight | 3,31 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364309869 |
| PU | 1 pc(s) |

*) all circuits without test prod

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.